

To ensure that your installation proceeds smoothly,
please read this instructions carefully before you begin.

American Standard

Signature

FFAS1701-101500ZNO
Single Hole Basin Mixer


FFAS1702-101500ZNO
Single Hole Extended Basin Mixer



FFAS1701-101500ZNO





FFAS1702-101500ZNO



Installation &
Operation Instruction



Dimension

FFAS1701-101500ZNO

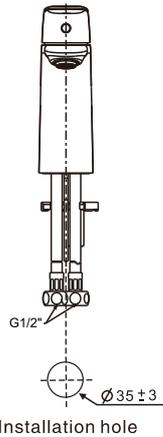

Installation hole $\varnothing 35 \pm 3$

FFAS1702-101500ZNO

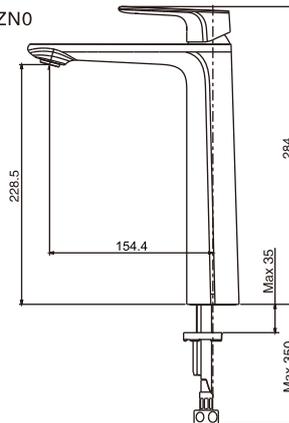


Installation hole $\varnothing 35 \pm 3$


Unit: mm

Installation



1 Preparation





- * Consult the dimension drawing and lay the pipes.
- * Wash and clean the water supply pipeline.

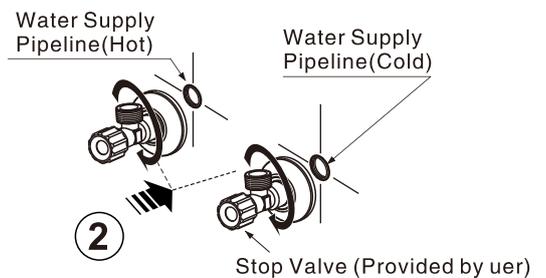

2 Faucet Installation

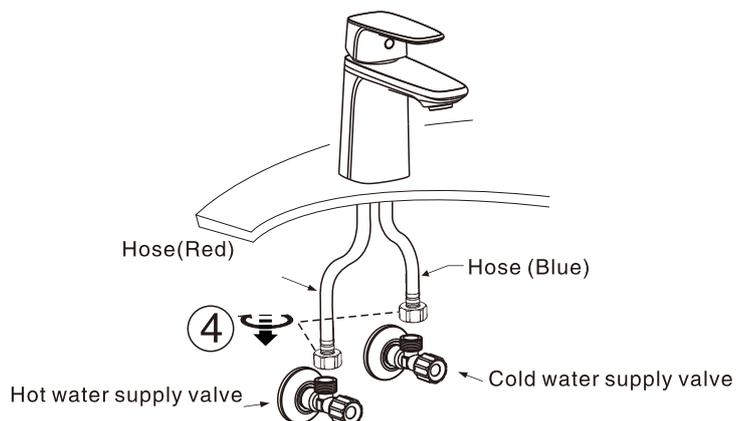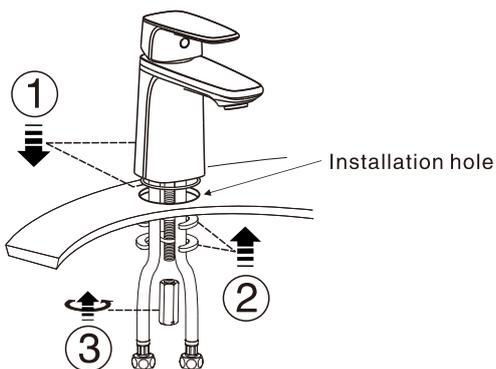

Parts List

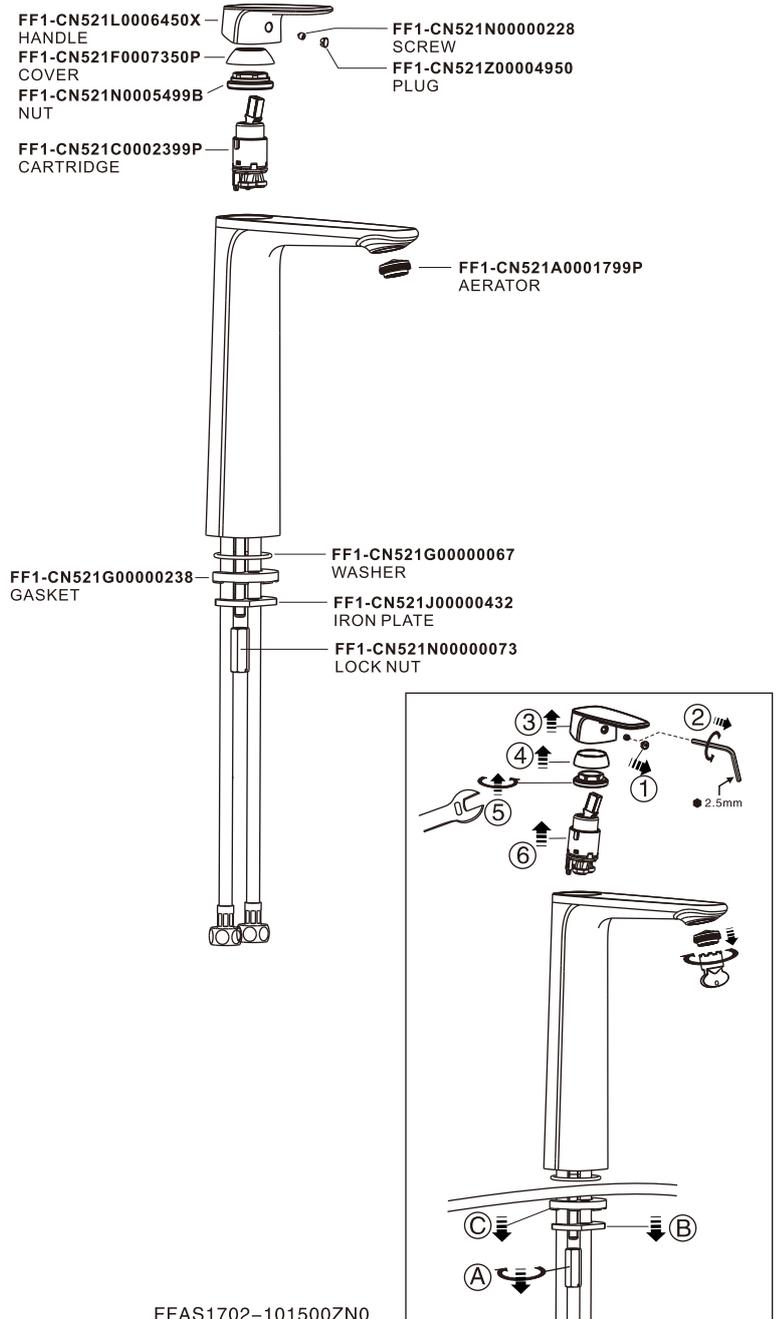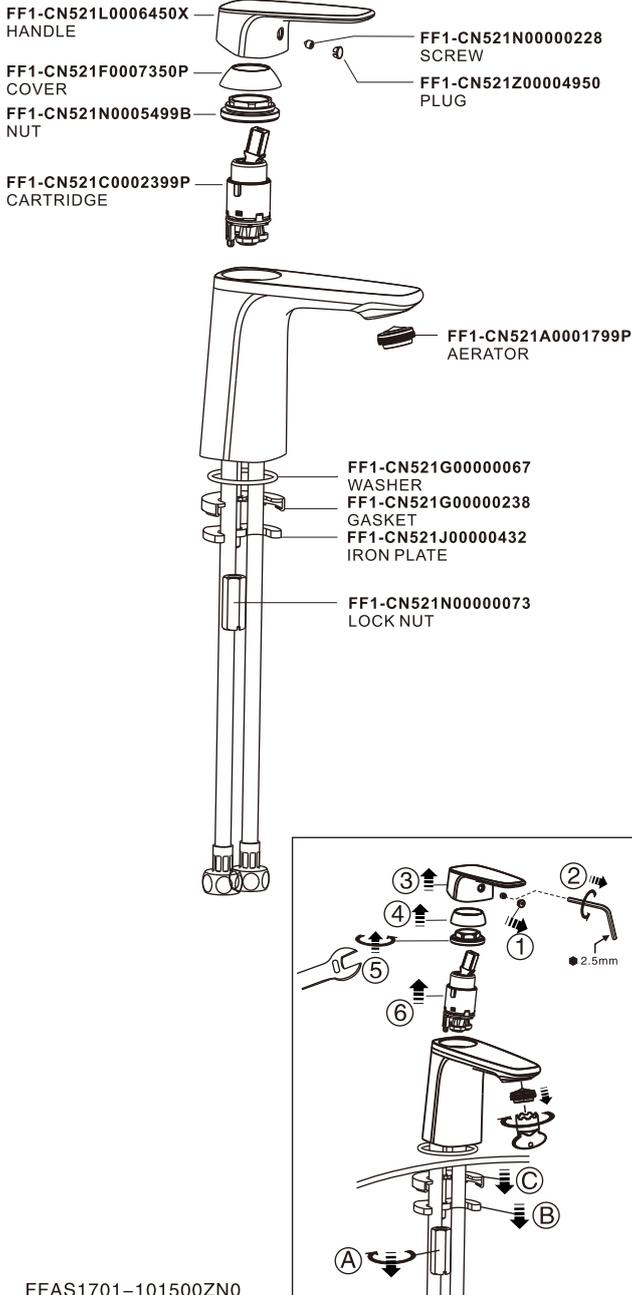

Notice

- * Remove all impurity in pipes before beginning to avoid clogging. Connect faucet pipes correctly.
- * Check installation distances in the Dimension diagram to ensure correct installation.
- * When in the process of installation, Please grab the body. Do not grab handle only.

Conditions for use

- * Water pressure condition: 0.05~0.75MPa (Recommended water pressure condition: 0.1~0.5MPa)
- * Ambient temperature: 1~55°C
- * Water temperature: 4°C ~ 90°C (Recommended hot water temperature 50~60°C)
- * Steam should not be used with product.
- * Note: Ensure water source is clean. Poor water quality can cause cartridge and internal components to clog, resulting in poor volume control and/ or product failure.



Reece Australia Pty Ltd
 118 Burwood Hwy
 Burwood VIC 3125
 Tel.: 1800 080 055
 Email: customercare@reece.com.au



Robertson
 25 Vestey Drive
 Mt Wellington, Auckland
 Tel.: +64 9 5730490
 Email: sales@robertson.co.nz