


2023年3月31日

A/O

| Tolerance, Unless Otherwise Stated. Is | | | |
|---|------|--|------|
| Above 0.5 to and including 6 | 6 | | ±0.1 |
| Excess 6 to and including 30 | 30 | | ±0.2 |
| Excess 30 to and including 120 | 120 | | ±0.3 |
| Excess 120 to and including 315 | 315 | | ±0.5 |
| Excess 315 to and including 1000 | 1000 | | ±0.8 |
| Excess 1000 to and including 2000 | 2000 | | ±1.2 |

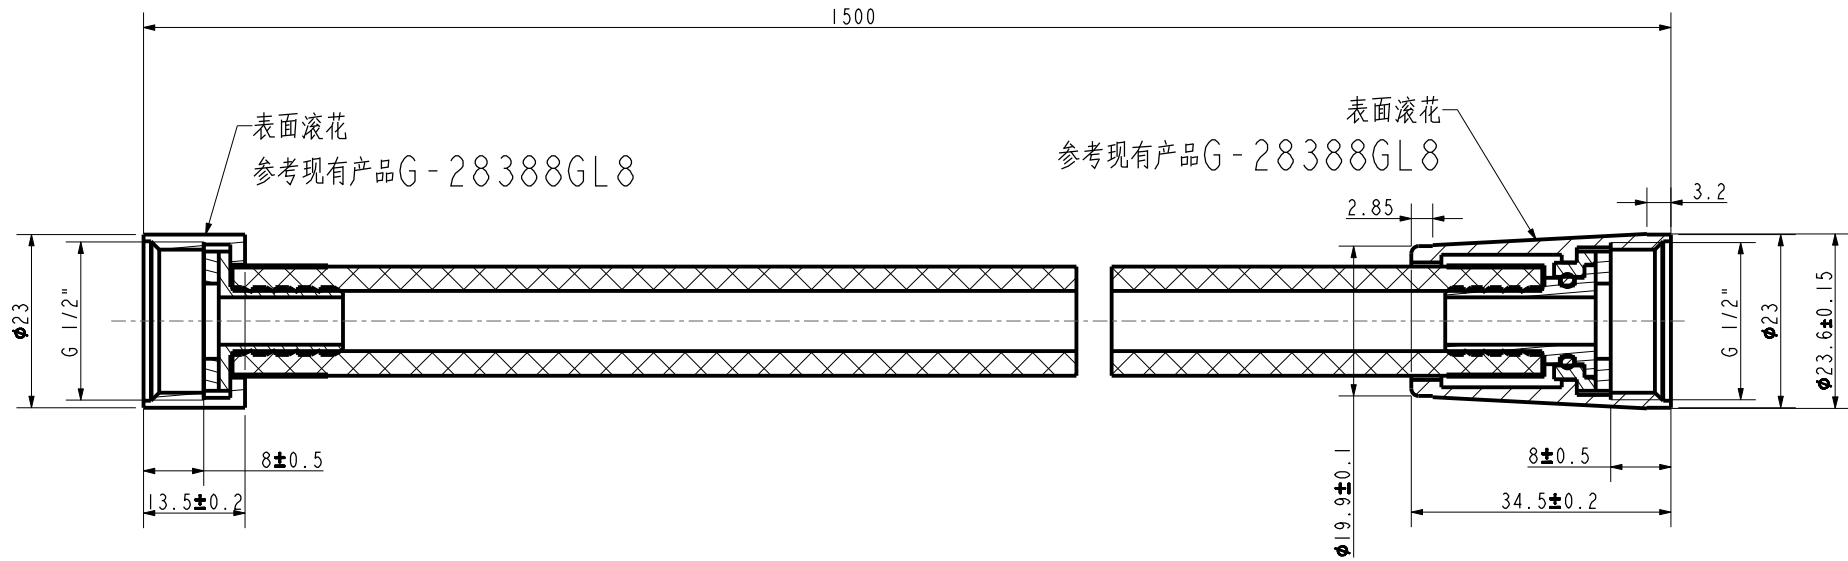

技术要求

1. 去毛刺
2. 螺纹通规通，止规止
3. 两端为铜件，中间是PVC，颜色PVD流云灰
结构和G-28388GL8一样，长度1.5m，不含LOGO
4. 外观符合W110.0575
5. 功能符合W110.0407
6. 无塑包装，两端接头用纸包好。

| | | | | |
|----------|--------------------|------------|---------|--------------------|
| DESIGNED | 利华沃 | 20230321 | TITLE | Hose |
| CHECKED | <i>[Signature]</i> | 2023.03.21 | REF | 防缠绕软管-1.5M_流云灰 |
| APPROVED | <i>[Signature]</i> | 2023.3.21. | DWG NO. | FFAS9127-000ALOBFO |
| SCALE | MATERIAL | WEIGHT | | |
| | | | | |

| REV | DESCRIPTION | DATE | NAME |
|-----|-------------|------|------|
| | | | |