




Tolerance, Unless Otherwise Stated, Is			
Above	0.5 to and including	6	±0.1
Excess	6 to and including	30	±0.2
Excess	30 to and including	120	±0.3
Excess	120 to and including	315	±0.5
Excess	315 to and including	1000	±0.8
Excess	1000 to and including	2000	±1.2

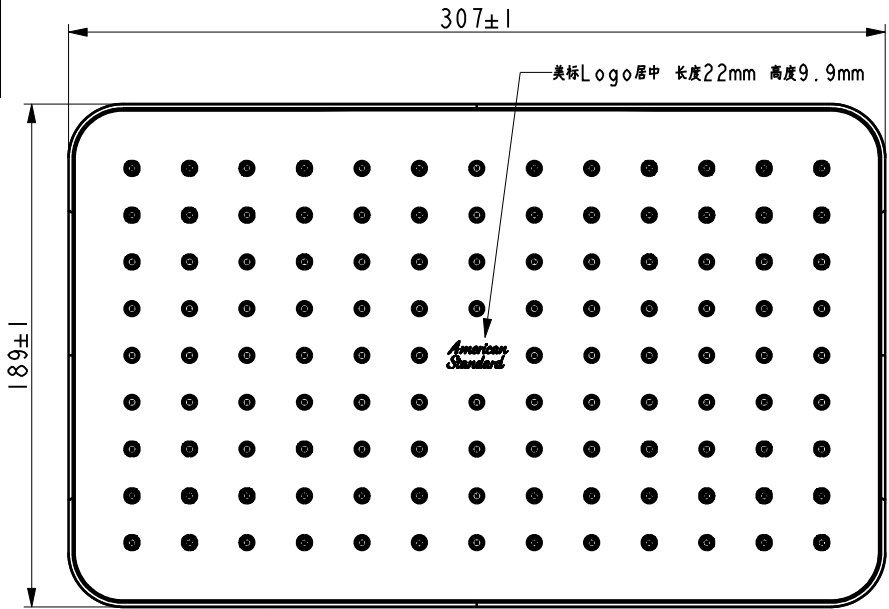

拉丝方向

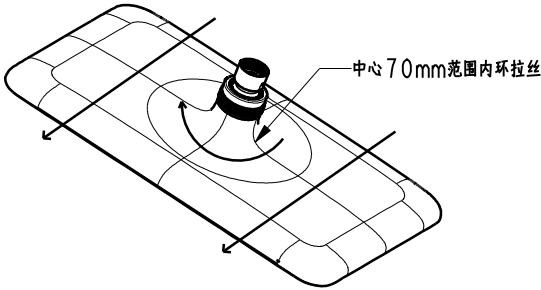

- 技术要求
1. 顶酒在如图所示位置移印美标Logo, 颜色Pantone冷灰色11C
 2. 各棱边无毛刺, 合缝口紧密, 各表面不得有凹痕、划伤、断牙等明显缺陷。
 3. 在动水压0.1MPa下 顶酒出水最大流量Q要求为 4.2L/min≤Q≤8L/min。
 4. 花洒的其他相关性能须符合《W110.0406内控标准--花洒》要求。
 5. 零件表面处理符合《W110.0575_内部检验标准》。
 6. 移印符合《W110.4810》。
 6. 此产品与FFI-CN52IH0005650P尺寸一样, 颜色不同。
 7. 彩盒包装。

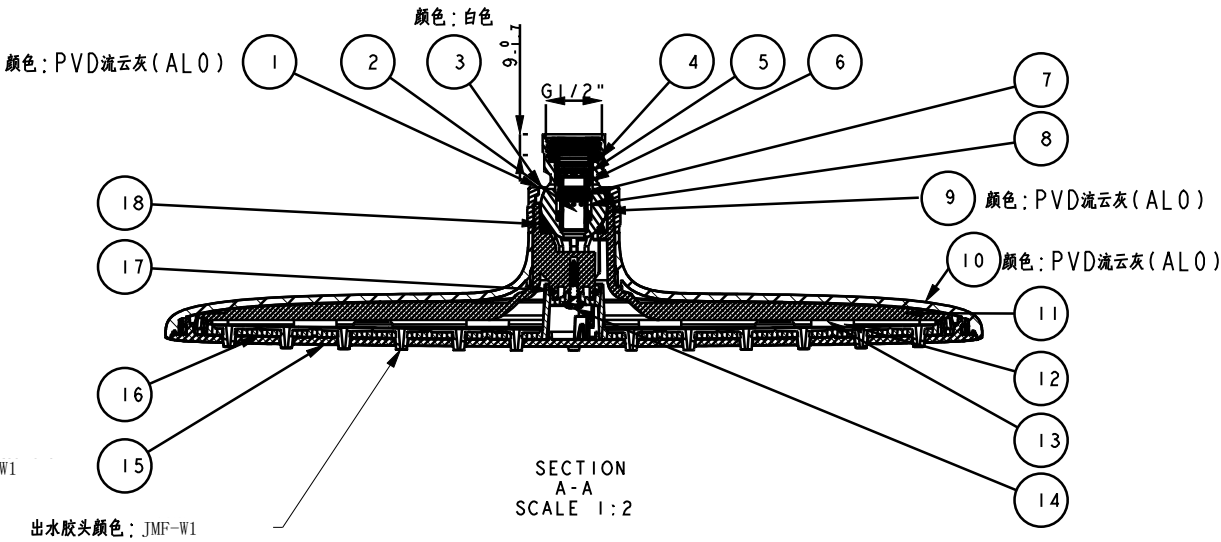

18	FFASS515-000AL0BF0-18	球面垫圈	PCS	1	EPDM
17	FFASS515-000AL0BF0-17	O圈	PCS	1	NBR70
16	FFASS515-000AL0BF0-16	TPR面盖	PCS	1	ABS+TPR
15	FFASS515-000AL0BF0-15	装饰盖	PCS	1	ABS
14	FFASS515-000AL0BF0-14	字槽盘头自攻螺	PCS	1	SUS303
13	FFASS515-000AL0BF0-13	自攻螺钉	PCS	8	SUS304
12	FFASS515-000AL0BF0-12	O圈	PCS	8	NBR70
11	FFASS515-000AL0BF0-11	固定座	PCS	2	ABS756K
10	FFASS515-000AL0BF0-10	本体	PCS	1	ABS
9	FFASS515-000AL0BF0-9	球形接头	PCS	1	Hpb9-1
8	FFASS515-000AL0BF0-8	进气芯	PCS	1	POM/M90/本色
7	FFASS515-000AL0BF0-7	V型圈	PCS	1	N6001
6	FFASS515-000AL0BF0-6	O圈	PCS	2	NBR70
5	FFASS515-000AL0BF0-5	节水片	PCS	1	POM+SUS304
4	FFASS515-000AL0BF0-4	漏网垫片	PCS	1	N7001+SUS304
3	FFASS515-000AL0BF0-3	衬套	PCS	1	POM/白色
2	FFASS515-000AL0BF0-2	紧定螺钉	PCS	1	SUS304
1	FFASS515-000AL0BF0-1	螺母	PCS	1	Hpb9-1
序号 /NO.	图号 /DWG NO.	品名 /NAME	单位 /U.	用数量 /QTY	备注 /REMARK

DESIGNED	利 华 沃	20230321	TITLE Head Shower		
CHECKED		2023.03.21	审核	易舒喜挂墙 2寸长方形顶洒_流云灰_面板全白	
APPROVED		2023.3.21.			
SCALE	MATERIAL	WEIGHT	DWG NO.	<i>American Standard</i>	
1:2	Assembly		FFASS515-000AL0BF0		

REV	DESCRIPTION	DATE	NAME