



Tolerance, Unless Otherwise Stated, Is			
Above	0.5 to and including	6	±0.1
Excess	6 to and including	30	±0.2
Excess	30 to and including	120	±0.3
Excess	120 to and including	315	±0.5
Excess	315 to and including	1000	±0.8
Excess	1000 to and including	2000	±1.2

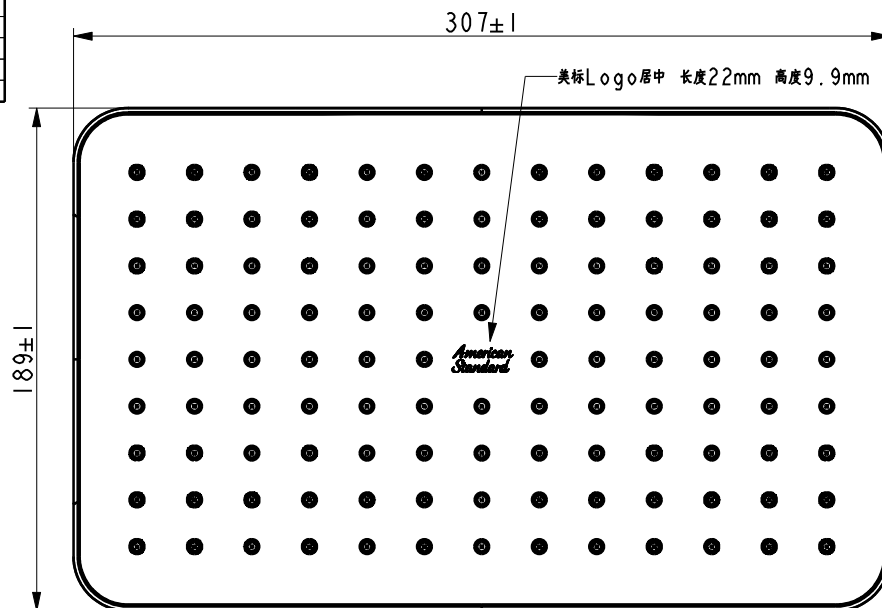

技术要求

1. 顶洒在如图所示位置移印美标Logo, 颜色Pantone冷灰色11C;
2. 各棱边无毛刺, 合缝口紧密, 各表面不得有凹痕、划伤、断牙等明显缺陷。
3. 在动水压0.1MPa下 顶洒出水最大流量Q要求为 4.2L/min ≤ Q ≤ 8L/min。
4. 花洒的其他相关性能须符合《W110.0406内控标准-花洒》要求。
5. 零件表面处理符合《W110.0575_内部检验标准》。
6. 移印符合《W110.4810》。
6. 此产品与FFI-CN521H0005650P尺寸一样, 颜色不同。
7. 彩盒包装。

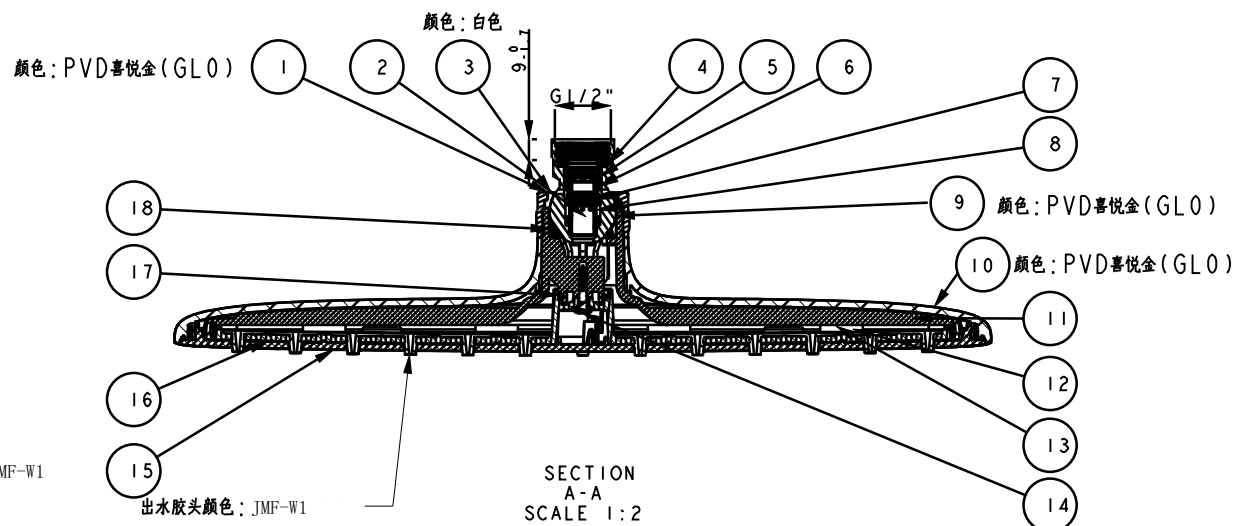

序号 / NO.	图号 / DWG NO.	品名 / NAME	单位 / U.	用数量 / QTY	备注 / REMARK
18	FFASS515-000GLOBFO-18	球面垫圈	PCS	1	EPDM
17	FFASS515-000GLOBFO-17	O圈	PCS	1	NBR70
16	FFASS515-000GLOBFO-16	TPR面盖	PCS	1	ABS+TPR
15	FFASS515-000GLOBFO-15	装饰盖	PCS	1	ABS
14	FFASS515-000GLOBFO-14	字槽盘头自攻螺	PCS	1	SUS303
13	FFASS515-000GLOBFO-13	自攻螺钉	PCS	8	SUS304
12	FFASS515-000GLOBFO-12	O圈	PCS	8	NBR70
11	FFASS515-000GLOBFO-11	固定座	PCS	2	ABS756K
10	FFASS515-000GLOBFO-10	本体	PCS	1	ABS
9	FFASS515-000GLOBFO-9	球形接头	PCS	1	Hpb9-1
8	FFASS515-000GLOBFO-8	进气芯	PCS	1	POM/M90/本色
7	FFASS515-000GLOBFO-7	V型圈	PCS	1	N6001
6	FFASS515-000GLOBFO-6	O圈	PCS	2	NBR70
5	FFASS515-000GLOBFO-5	节水片	PCS	1	POM+SUS304
4	FFASS515-000GLOBFO-4	漏网垫片	PCS	1	N7001+SUS304
3	FFASS515-000GLOBFO-3	衬套	PCS	1	POM/白色
2	FFASS515-000GLOBFO-2	紧定螺钉	PCS	1	SUS304
1	FFASS515-000GLOBFO-1	螺母	PCS	1	Hpb9-1

DESIGNED	利华沃	20230321	TITLE	Head Shower	
CHECKED	<i>[Signature]</i>	2023.03.21	REF		
APPROVED	<i>[Signature]</i>	2023.3.21	易舒喜挂墙 2寸长方形顶洒_喜悦金_面板全白		
SCALE	1:2	MATERIAL	Assembly	DWG NO.	FFASS515-000GLOBFO
				American Standard	

REV	DESCRIPTION	DATE	NAME