



2020年6月27日

A/2

Tolerance, Unless Otherwise Stated. Is	
Above 0.5 to and including 6	±0.1
Excess 6 to and including 30	±0.2
Excess 30 to and including 120	±0.3
Excess 120 to and including 315	±0.5
Excess 315 to and including 1000	±0.8
Excess 1000 to and including 2000	±1.2



1. 说明书双面印刷完成  
(297x210=A4) 共1张

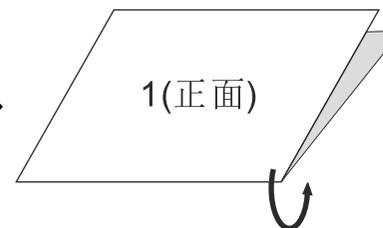

2. 说明书折叠完成

制作说明:

1. 说明书完成的尺寸: 148\*210
2. 材料: 80克的白色纸
3. 印刷说明: 说明书为297x210(A4) 双面印刷, 并折叠成148x210大小完成(详看图示)
4. 印刷颜色: 黑白
5. 印刷时, 内容准确, 清晰, 墨色均匀, 表面清洁。

FFAST826-709500XX0  
EasyFLO Concealed Shower Mono  
FFAST826-709090XX0  
EasyFLO Concealed Shower Mono (Glossy White)  
FFAST826-709440XX0  
EasyFLO Concealed Shower Mono (Matt Black)


				DESIGN	黄卓桓	2020.06.19	TITLE	Instructions	
				CHECKED	利华斌	2020.06.19	REF		
				APPROVED	[Signature] 2020.6.19			英文说明书	
A2	修改零件料号	2020.06		SCALE	MATERIAL	WEIGHT	DWG NO.	American Standard	
A1	增加零件料号	2020.06					FF1-CN521K00308299		
REV	DESCRIPTION	DATE	NAME						

## Test / Usage

### 1 Test

- \* Turn on water supply valve and check all connections for leakage.
- \* Turn on the faucet and check the flow of water.

### 2 Usage

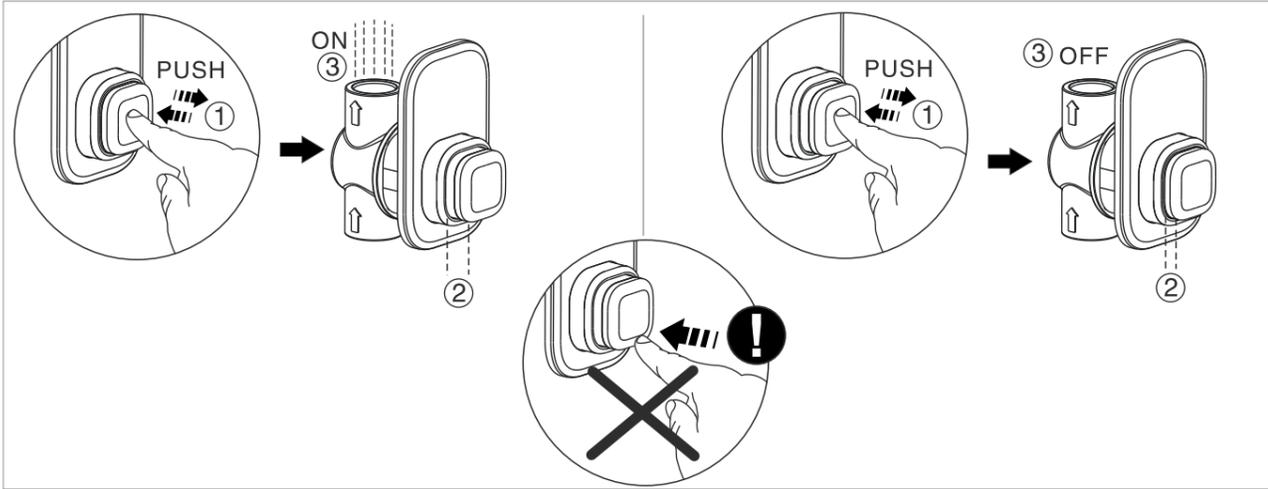


2020年6月27日

A/2

## EasyFLO

FFAST826-709500XX0  
EasyFLO Concealed Shower Mono  
FFAST826-709090XX0  
EasyFLO Concealed Shower Mono (Glossy White)  
FFAST826-709440XX0  
EasyFLO Concealed Shower Mono (Matt Black)



American Standard

Installation/Operating Manual

Thank you for selecting American Standard, the benchmark of fine quality for over 100 years. To ensure that your installation proceeds smoothly, please read these instructions carefully before you begin.

- \* American Standard continually improves our product design and performance. American Standard reserves the right to modify the dimensions and specifications of our product accordingly without any prior notification.
- \* Actual dimensions and specifications may vary, refer to physical product for exact dimensions and specifications.

## Pre-Installation Checks

- \* Remove all impurities in pipes before beginning installation, to avoid clogging. Connect the faucet pipes correctly.
- \* Check installation distances shown in the dimension diagram to ensure correct installation.

### Conditions for use

- \* Water pressure condition: 0.05~0.75MPa (Recommended water pressure condition: 0.1~0.5MPa)
- \* Ambient temperature: 1~55°C
- \* Water temperature: 4°C ~ 49°C
- \* Steam should not be used with the product
- \* Note: Ensure water source is clean. Poor water quality can cause the cartridge and internal components to clog, resulting in poor product performance.

## Trouble Shooting Guide

Issue	Component	Checkpoint	Corrective Action
Poor flow rate	Shower	Check if shower is clogged	Remove all impurities
	Water supply valve	Check lever position	Lift lever to maximise water volume
	Hose	Check if hose is twisted	Untwist the hose
Leakage	Cartridge	Check if cartridge is loosened	Fasten or replace cartridge
	Connection joints	Check the connection	Reassemble connecting part

## Recommended Tools and Materials



Adjustable Wrench



Teflon Tape




Cutting knife



Silicone(Neutral)


## Care & Maintenance

- \* Clogged cartridges due to poor water quality can affect product performance.
- \* Follow the steps below to maintain optimal product performance.
- \* Note: please turn off water supply before maintenance.

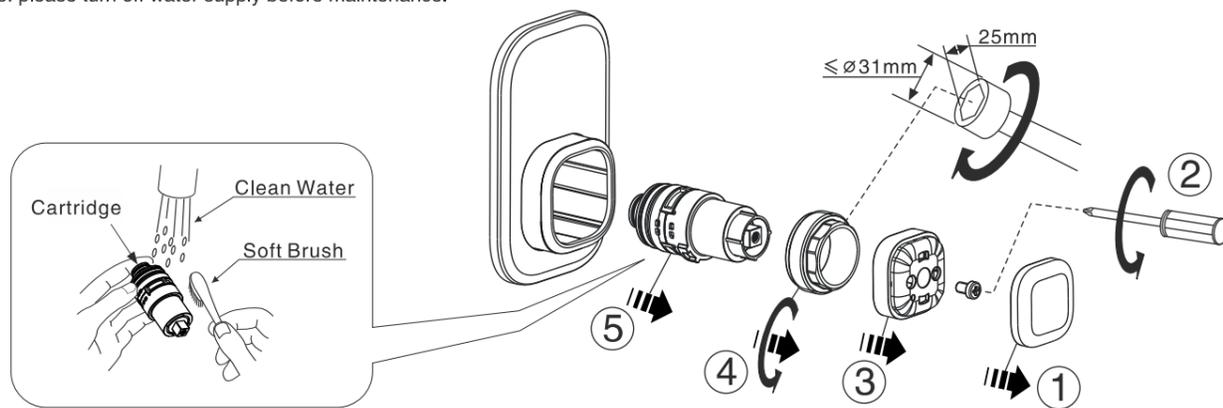


**Attention:**  
Please leave manual with customer post installation.


## Dimensions

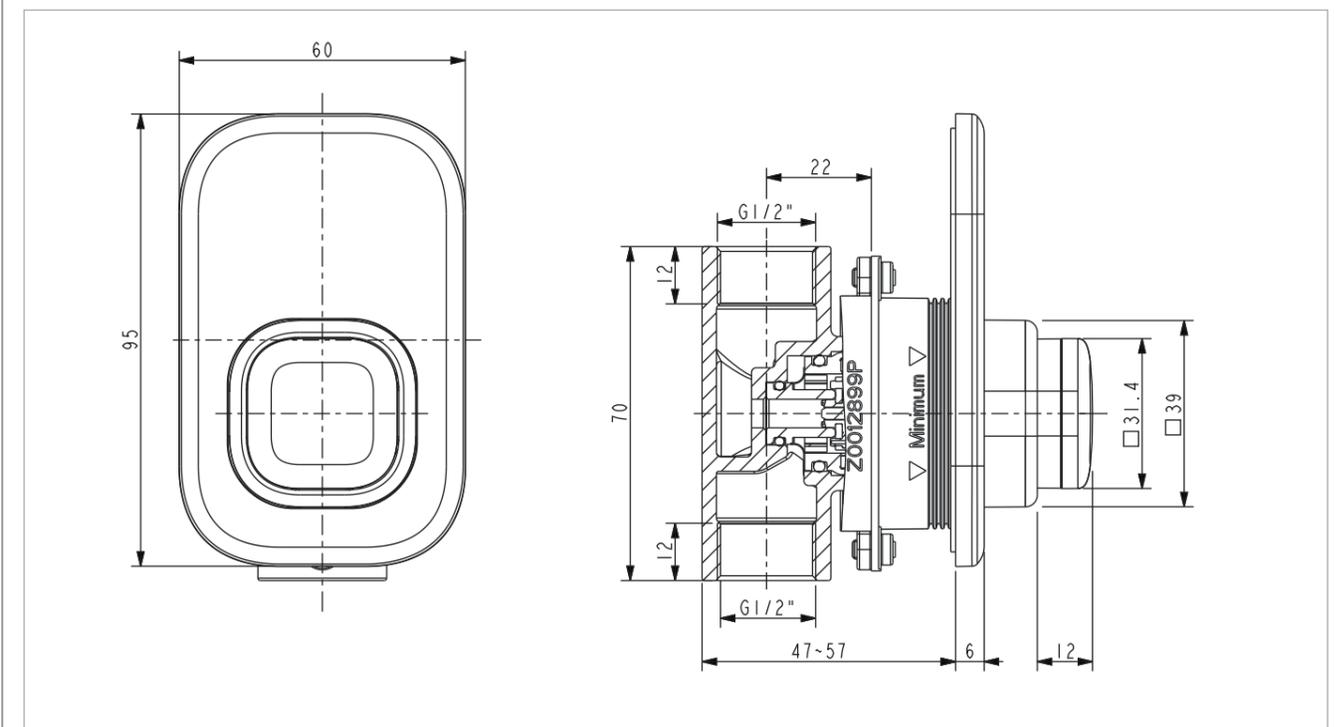

## Parts List

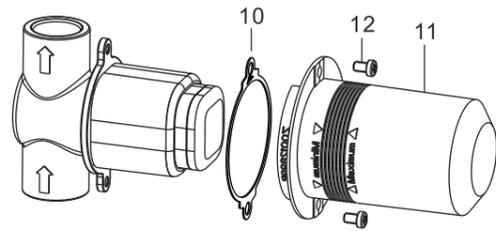


No.	Part Code	Part Name	Q'ty
1	FF1-CN521F0008250P	Handle Cap(chrome)	1
1a	FF1-CN521F0008209P	Handle Cap(glossy white)	1
1b	FF1-CN521F0008244P	Handle Cap(matt black)	1
2	FF1-CN521N00000236	Screw	1
3	FF1-CN521J0017909P	Handle Insert(white)	1
3a	FF1-CN521J0017950P	Handle Insert(chrome)	1
4	FF1-CN521N0005799P	Nut	1
5	FF1-CN522X70046099	Cartridge	1
6	FF1-CN521J0018450P	Cartridge Bushing(chrome)	1
6a	FF1-CN521J0018409P	Cartridge Bushing(glossy white)	1
6b	FF1-CN521J0018444P	Cartridge Bushing(matt black)	1
7	FF1-CN521G00000359	O-Ring	1
8	FF1-CN521F0008350P	Escutcheon(chrome)	1
8a	FF1-CN521F0008309P	Escutcheon(glossy white)	1
8b	FF1-CN521F0008344P	Escutcheon(matt black)	1
9	FFZZ0021-0024599MC	Body	1
10	FF1-CN521G0007799R	Washer	1
11	FF1-CN521Z0012899P	Cover	1
12	FF1-CN521N00000236	Screw	2

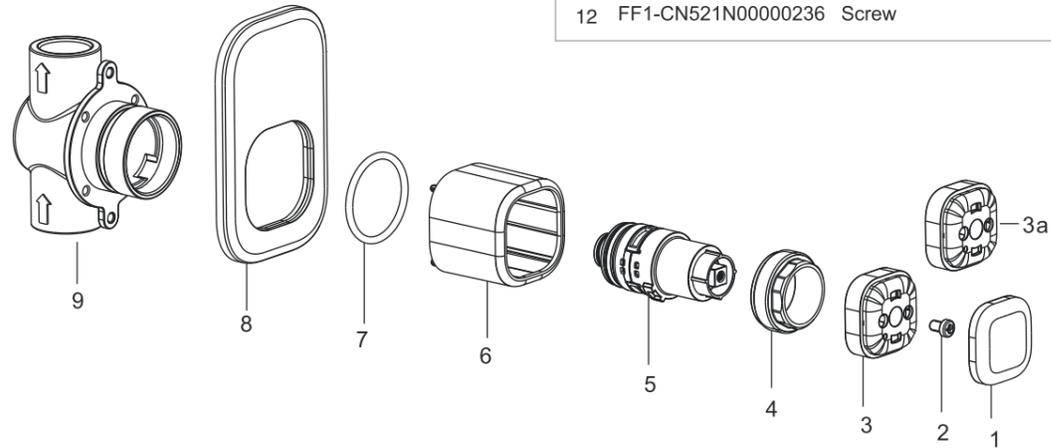

2020年6月27日

A/2

## Preparation

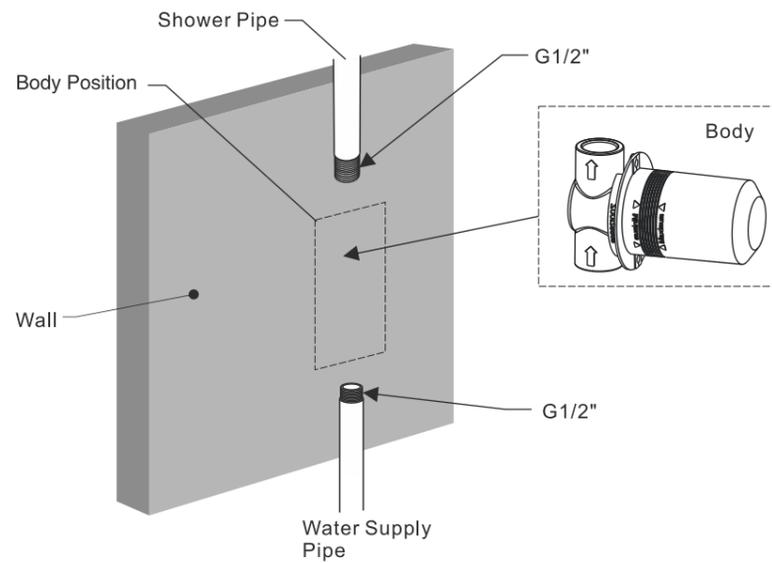


① \* Lay the pipes with reference to the dimension drawing.



② \* Before installation, ensure that the pipes are not clogged.

## Installation

### 1 Body Installation

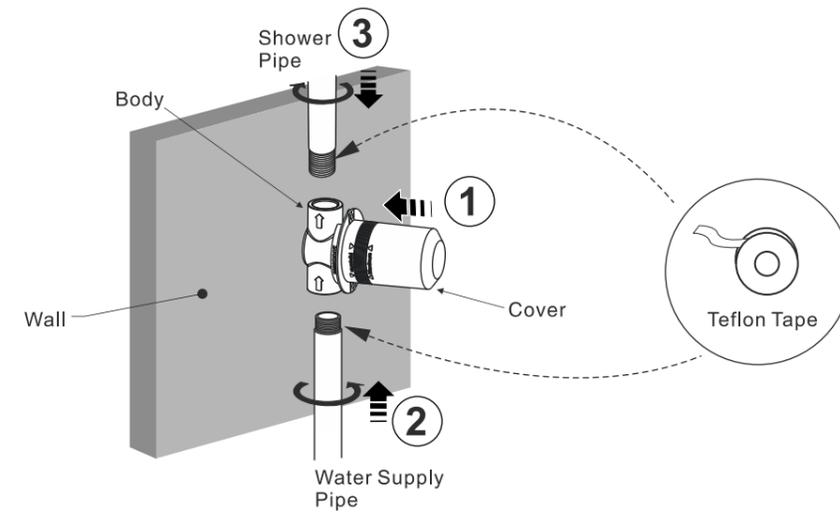

### 2 Finished Wall

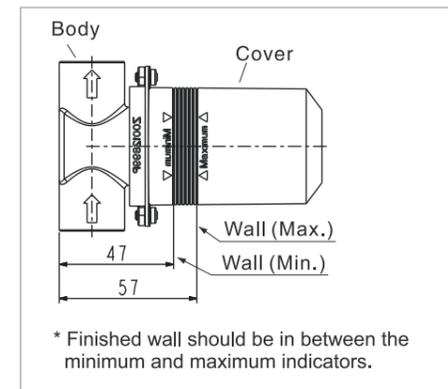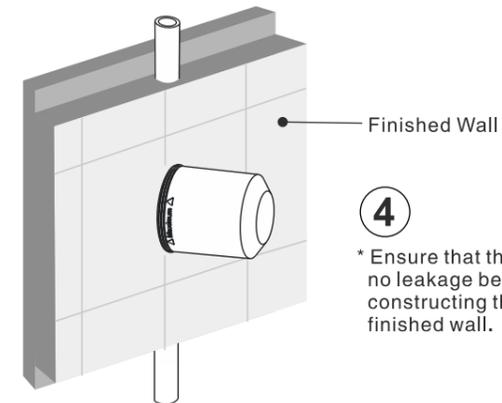

### 3 Escutcheon Installation

