




Tolerance, Unless Otherwise Stated. Is	
Above 0.5 to and including 6	±0.1
Excess 6 to and including 30	±0.2
Excess 30 to and including 120	±0.3
Excess 120 to and including 315	±0.5
Excess 315 to and including 1000	±0.8
Excess 1000 to and including 2000	±1.2



1. 说明书单面印刷完成
(210x297=A4) 共1页



2. 说明书折叠

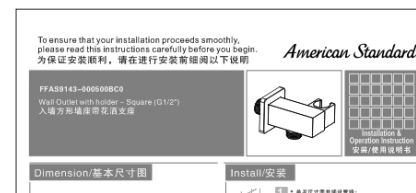

4. 说明书折叠完成

制作说明:

1. 说明书完成的尺寸: 210*100
2. 材料: 80克的白色纸
3. 印刷说明: 说明书为210x297(A4) 单面印刷, 并折叠成210x100大小完成(详看图示)
4. 印刷颜色: 灰度
5. 印刷时, 内容准确, 清晰, 墨色均匀, 表面清洁。



DESIGN	黄卓桓	2022.11.18	TITLE	Instructions
CHECKED	刘日群	2022.11.18	REF	中英文说明书(PVD)_ FFAS9143-000XXXBF0 FFAS9143-000XXXBT0
APPROVED	郭子尧	2022.11.18		
SCALE	MATERIAL	WEIGHT	DWG NO.	American Standard
REV	DESCRIPTION	DATE	NAME	

To ensure that your installation proceeds smoothly, please read this instructions carefully before you begin.

American Standard


FFAS9143-000XXXBF0
 FFAS9143-000XXXBT0
 Wall Outlet with holder – Square (G1/2")

XXX = AL0 / A00 / DA0 / GL0 / 440 / 500

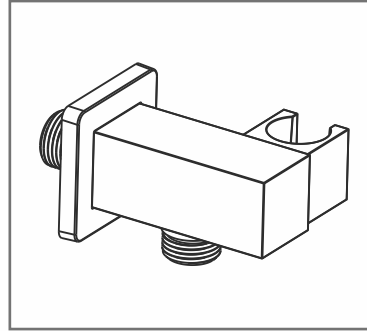


Installation & Operation Instruction


Dimension

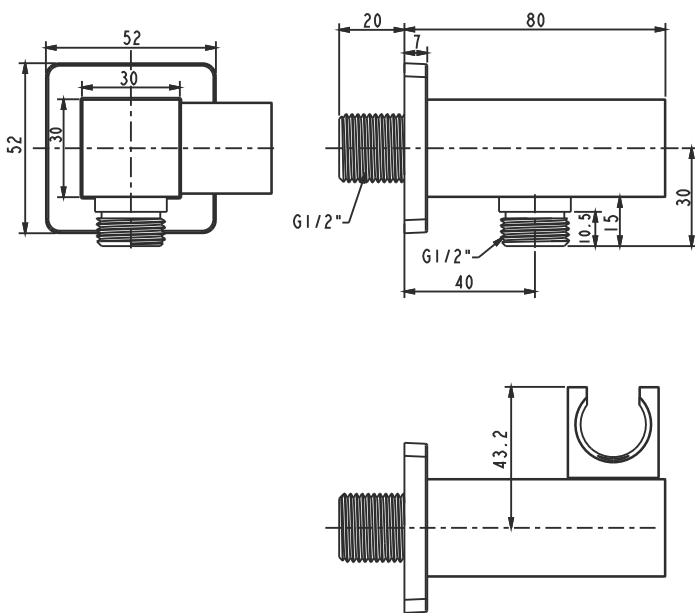

Installation

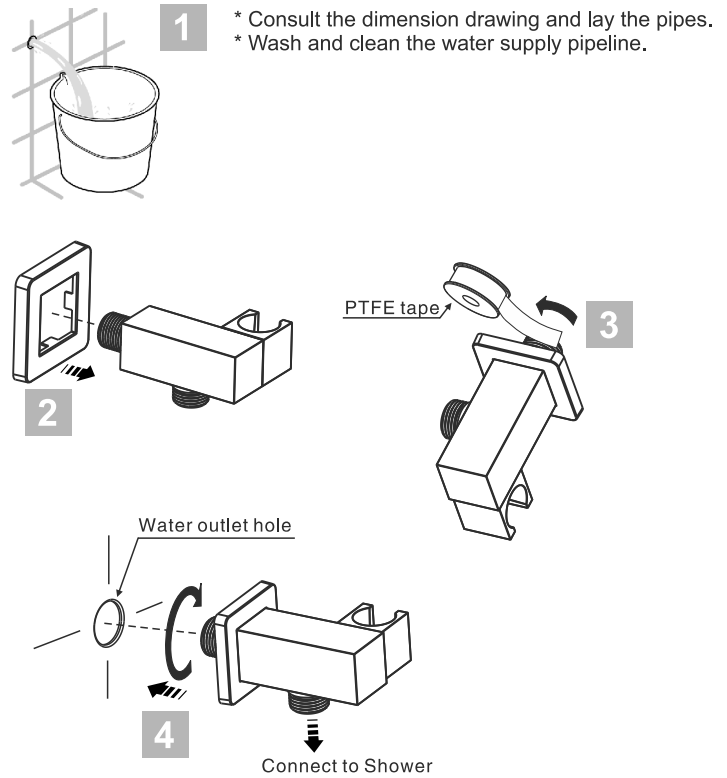

Parts List

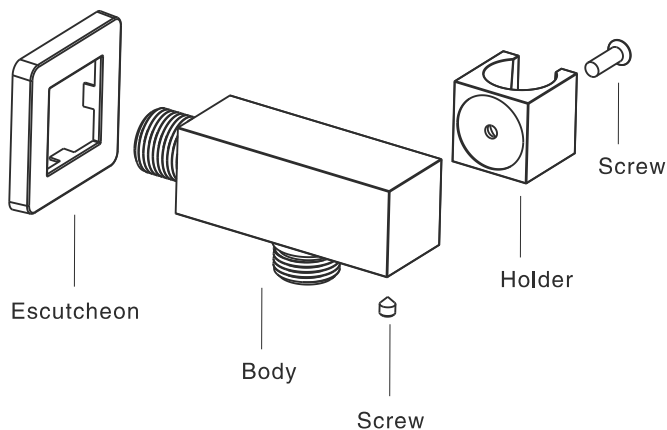

Notice

Remove all impurity in pipes before beginning to avoid clogging. Connect faucet pipes correctly.

When you repair the faucet you will need to shut off hot/cold water supply by closing the water supply.

Conditions for use

- * Water pressure condition: 0.1MPa~0.75MPa (Recommended: 0.1MPa~0.5MPa)
- * Environment Temperature: 1°C~55°C
- * Not for use as a steam outlet.

Cleaning the surface of faucet

- * Rinse the product with clean water.
- * Dry with soft cotton flannel cloth.
- * Do not clean the product with acid, polish, abrasives, harsh cleaners, or cloth with a harsh surface as these products may damage the finish.