
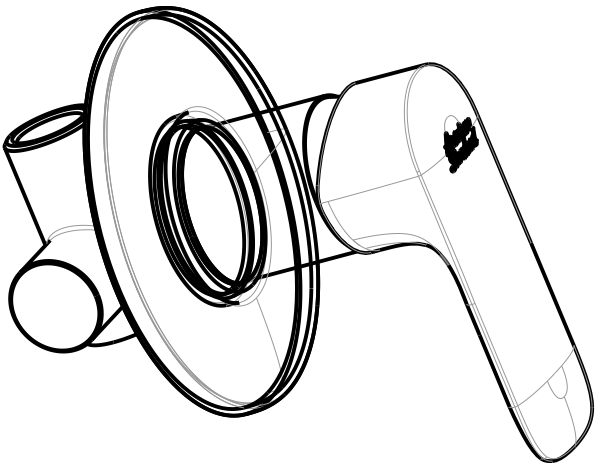


Tolerance, Unless Otherwise Stated, Is				
Above	0.5 to and including	6	±0.1	
Excess	6 to and including	30	±0.2	
Excess	30 to and including	120	±0.3	
Excess	120 to and including	315	±0.5	
Excess	315 to and including	1000	±0.8	
Excess	1000 to and including	2000	±1.2	

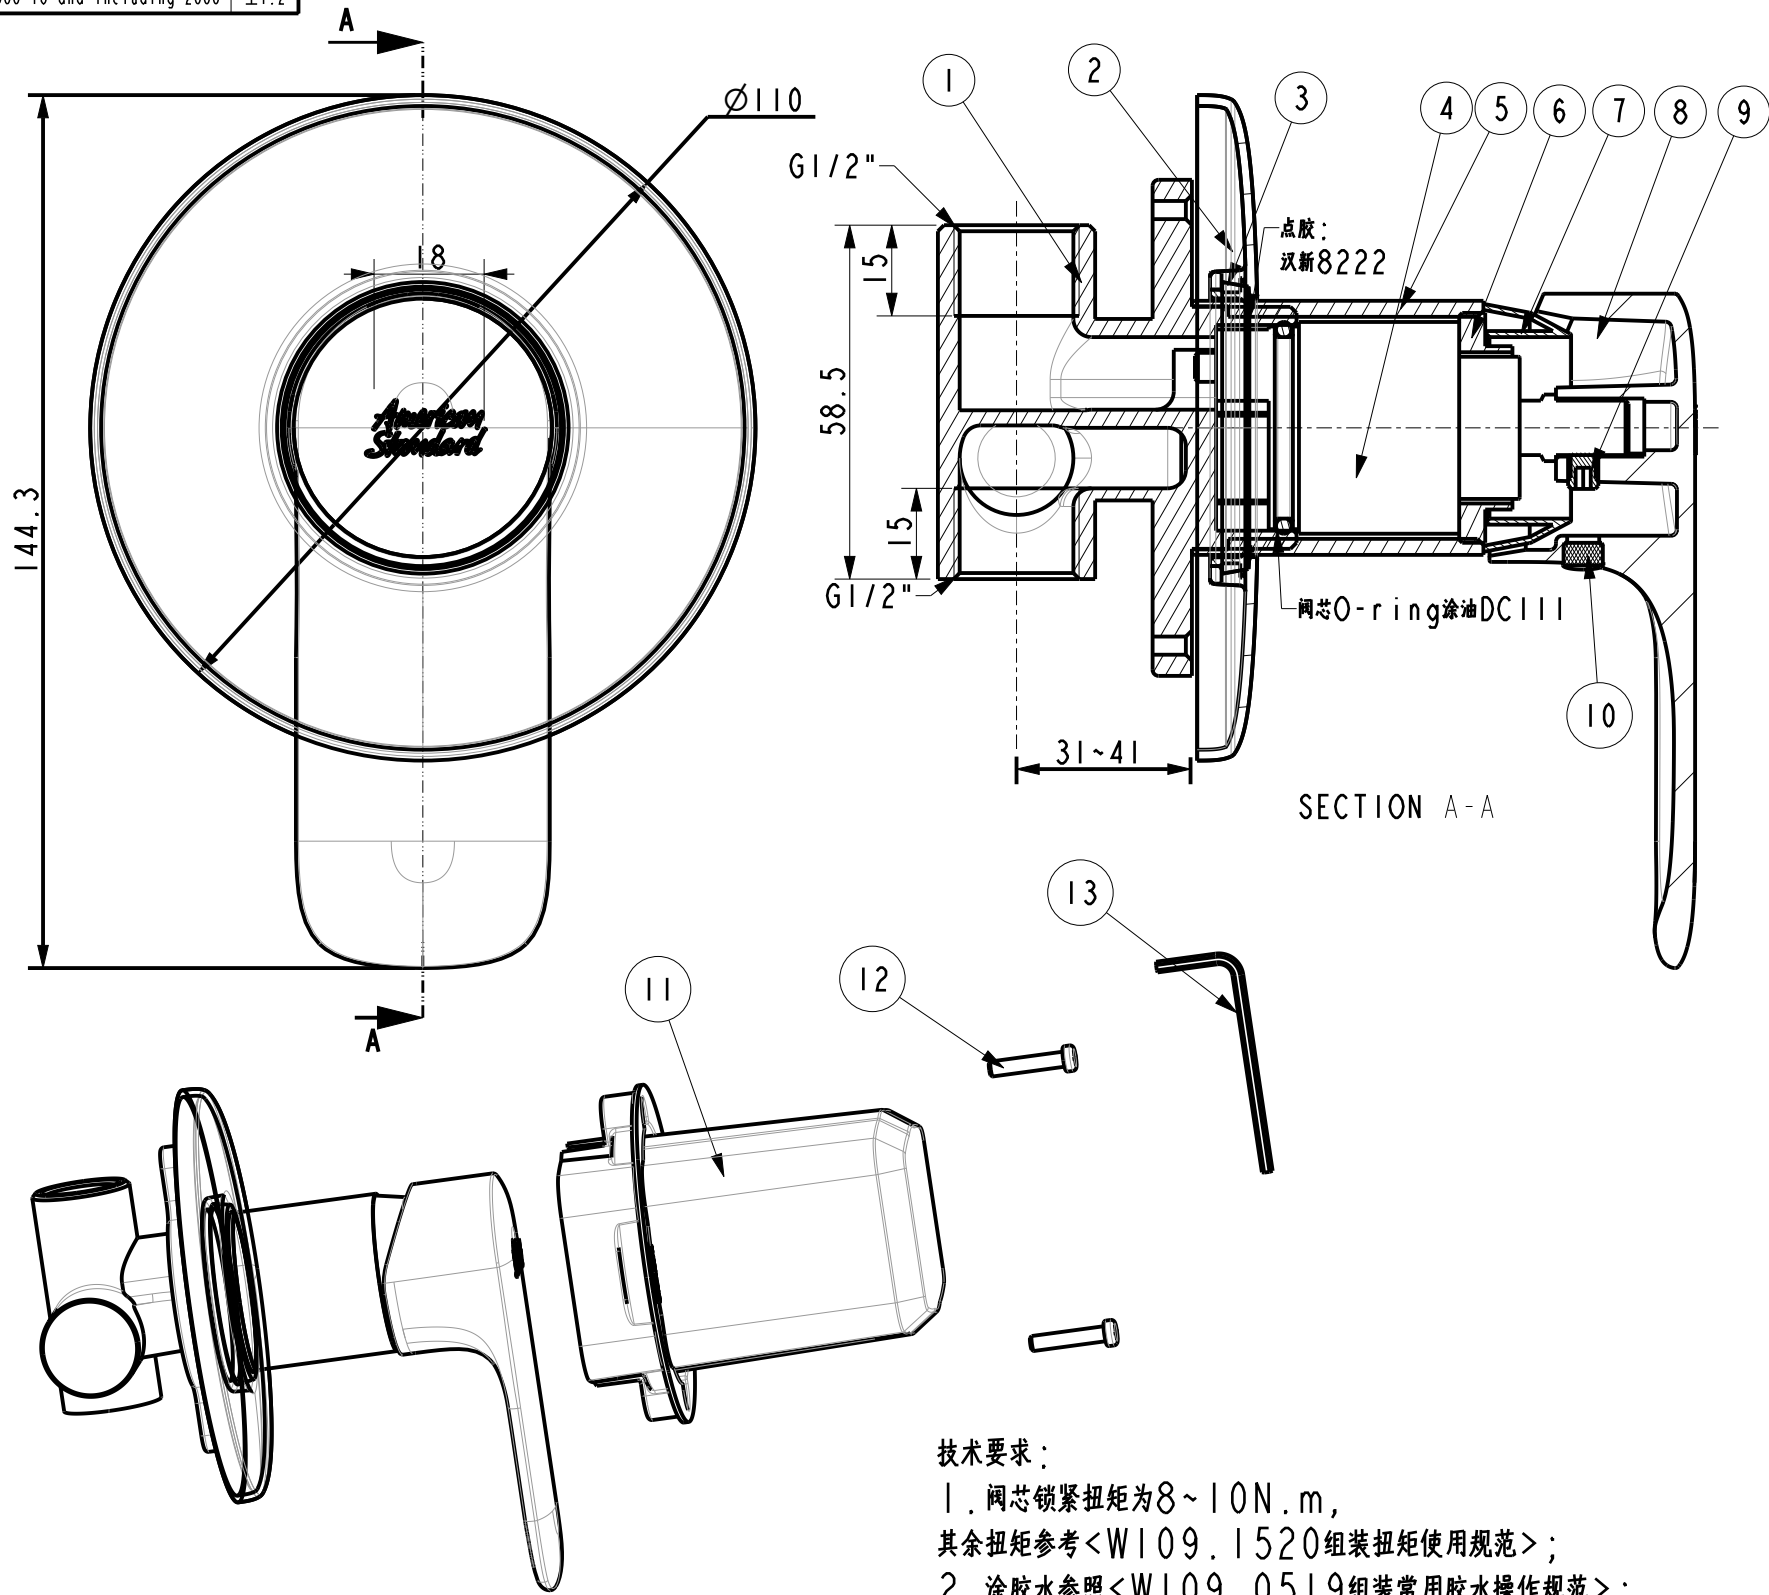

13	FF1-CN521Z00000254	1582361599\H01入墙式混水阀内六方板手	1	Q235	
12	FF1-CN521N00000194	15818609F4\2002 保护套螺钉	2	SUS304	
11	FF1-CN521Z00000212	1582240799\入墙淋浴保护套(47#)	1	PP	
10	G-01050031	把手孔塞	1	TPE	
9	FF1-CN521N00000228	希丽亚台面浴缸内六方把手螺钉M5*6	1	SUS304	
8	G-417215040	把手	1	ZZnAL4-1	镀铬
7	FF1-CN521F0004050P	阿卡西亚单孔顶盖(改进型)	1	ABS	镀铬
6	FF1-CN521N00000091	1580664199\迈阿密入墙式浴缸水嘴锁紧螺母	1	Hpb59-1	
5	FF1-CN521J00000485	158K605773\艾嘉入墙式阀芯铜套	1	Hpb59-1	镀铬
4	FF1-CN521C00001399	C35G-1高脚阀芯(N35HSW)	1	组件	
3	G-417213031	密封圈Ø42.2 PVC	1	PVC	
2	G-417212038	圆形装饰面板	1	ZZnAL4-1	镀铬
1	FFZZ0021-0028199MC	奥斯单冷入墙淋浴龙头本体(AA,加工件)	1	GkM s60Rk	
序号	零件编号	零件名称	数量	材料	备注

DESIGNED	韦振明	2022.09.01	TITLE	Concealed Shower Mone	
CHECKED			REF	入墙单冷淋浴控制阀	
APPROVED					
SCALE	MATERIAL	WEIGHT	DWG NO.	American Standard	
4:5	Assembly		FFASIM36-709500BF0		

技术要求：
1. 阀芯锁紧扭矩为8~10N.m，
其余扭矩参考<W109.1520组装扭矩使用规范>;
2. 涂胶水参照<W109.0519组装常用胶水操作规范>;
3. 产品组装后符合<W110.0507最终检验标准--水嘴(泰国)>.

REV	DESCRIPTION	DATE	NAME