
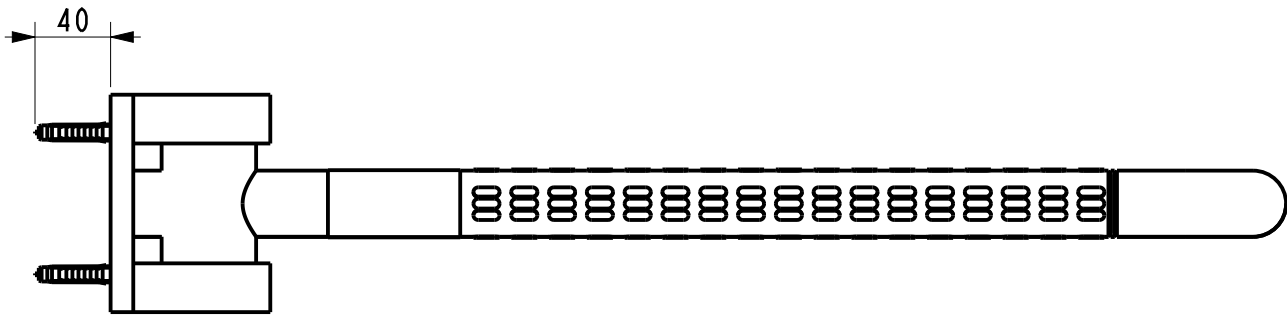
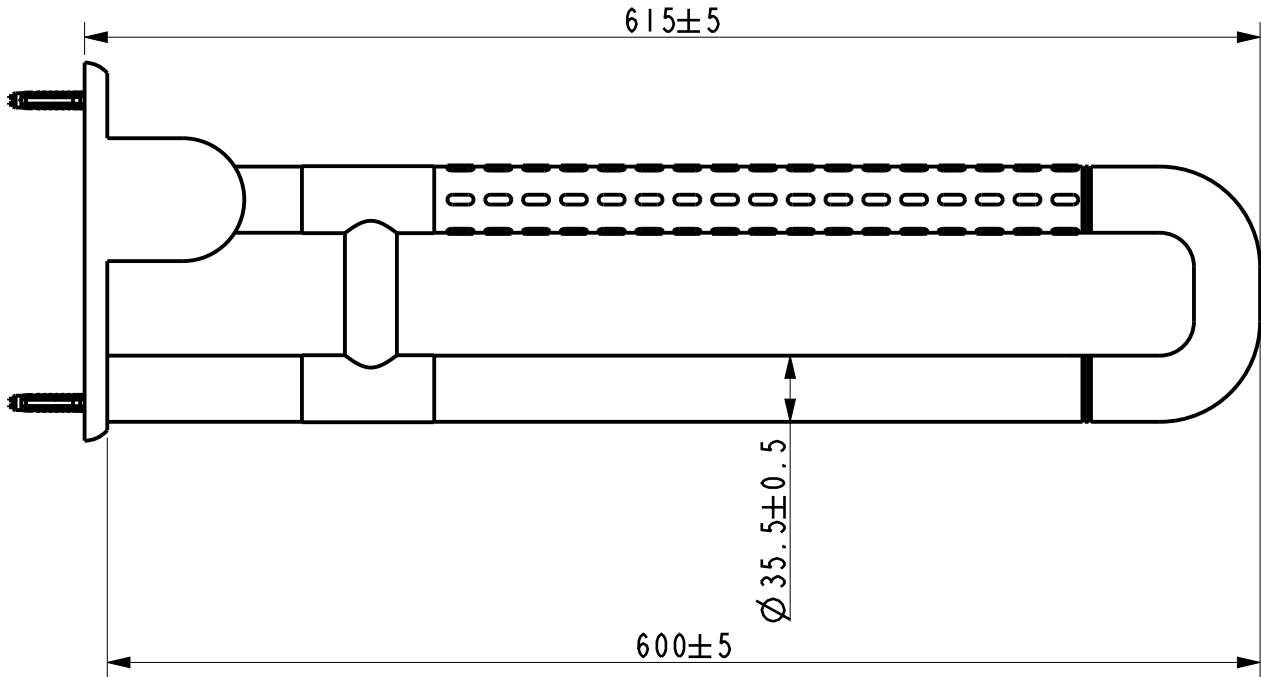
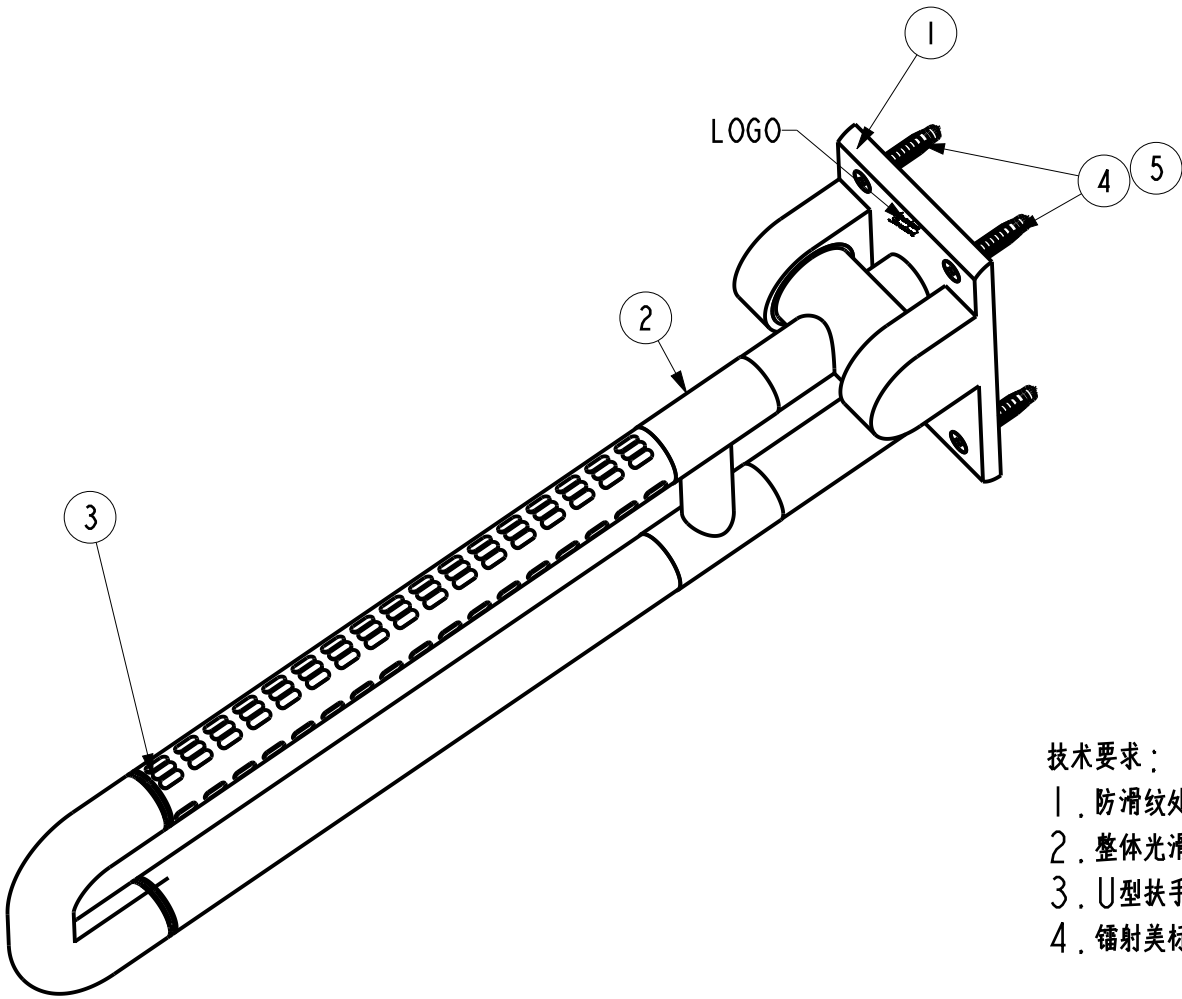


Tolerance, Unless Otherwise Stated, Is				
Above	0.5 to and including	6	±0.1	
Excess	6 to and including	30	±0.2	
Excess	30 to and including	120	±0.3	
Excess	120 to and including	315	±0.5	
Excess	315 to and including	1000	±0.8	
Excess	1000 to and including	2000	±1.2	

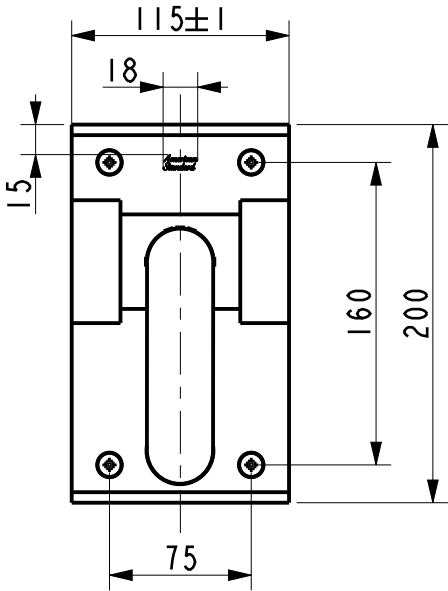

技术要求：

- 1. 防滑纹处要有防滑纹。
- 2. 整体光滑，无毛刺。
- 3. U型扶手能绕固定座转动。
- 4. 镭射美标Logo。

5	FF1-CN521Z9Z940105	膨胀套	4	NYLON	长度40mm,配合孔为c8
4	FF1-CN521Z9Z940104	自攻螺钉	4	SUS304	GB/T846 ST5.5X50
3	FF1-CN521Z9Z940103	U型扶手	1	尼龙	
2	FF1-CN521Z9Z940102	H型支撑杆	1	SUS304	
1	FF1-CN521Z9Z940101	底座	1	SUS304	
序号	物料代码	名称及描述	数量	材料	备注

DESIGNED			TITLE GRAB BAR C601	
CHECKED			REF CF-9401.000.04\上翻扶手(C601)	
APPROVED				
SCALE	MATERIAL	WEIGHT	DWG NO.	American Standard
			FFAS9401-000040BC0	