

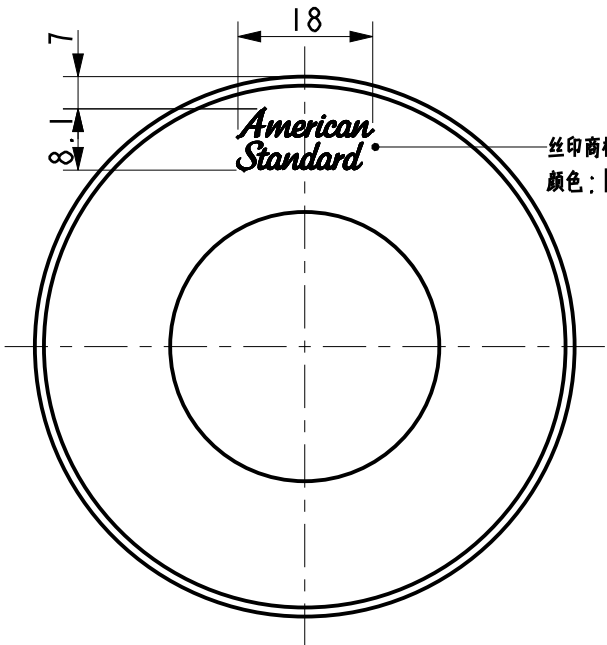
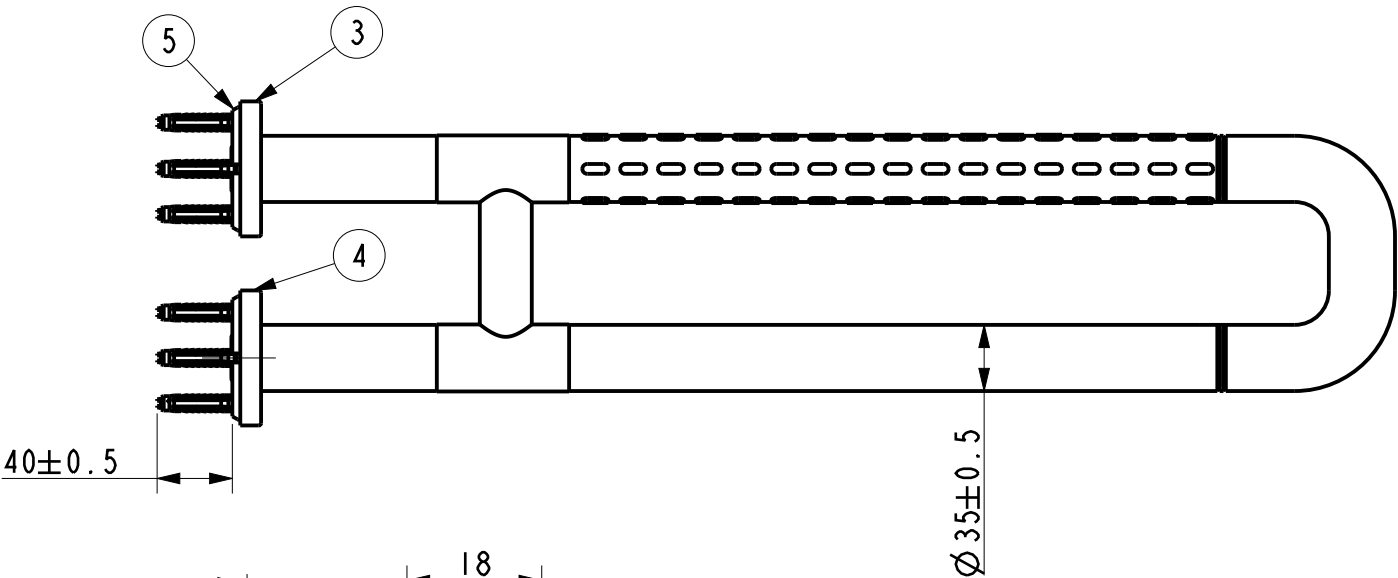


Tolerance, Unless Otherwise Stated, Is				
Above	0.5 to and including	6	±0.1	
Excess	6 to and including	30	±0.2	
Excess	30 to and including	120	±0.3	
Excess	120 to and including	315	±0.5	
Excess	315 to and including	1000	±0.8	
Excess	1000 to and including	2000	±1.2	

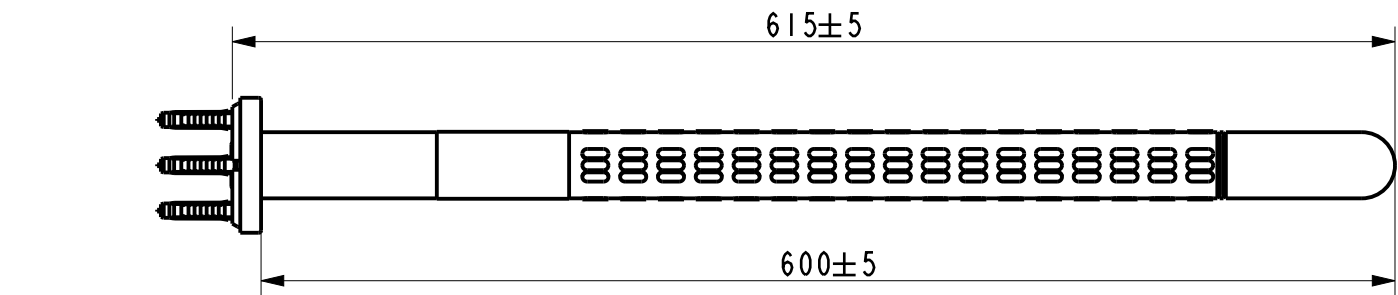

SCALE 1:000

技术要求:
1.防滑纹处要有防滑纹。
2.整体光滑, 无毛刺。

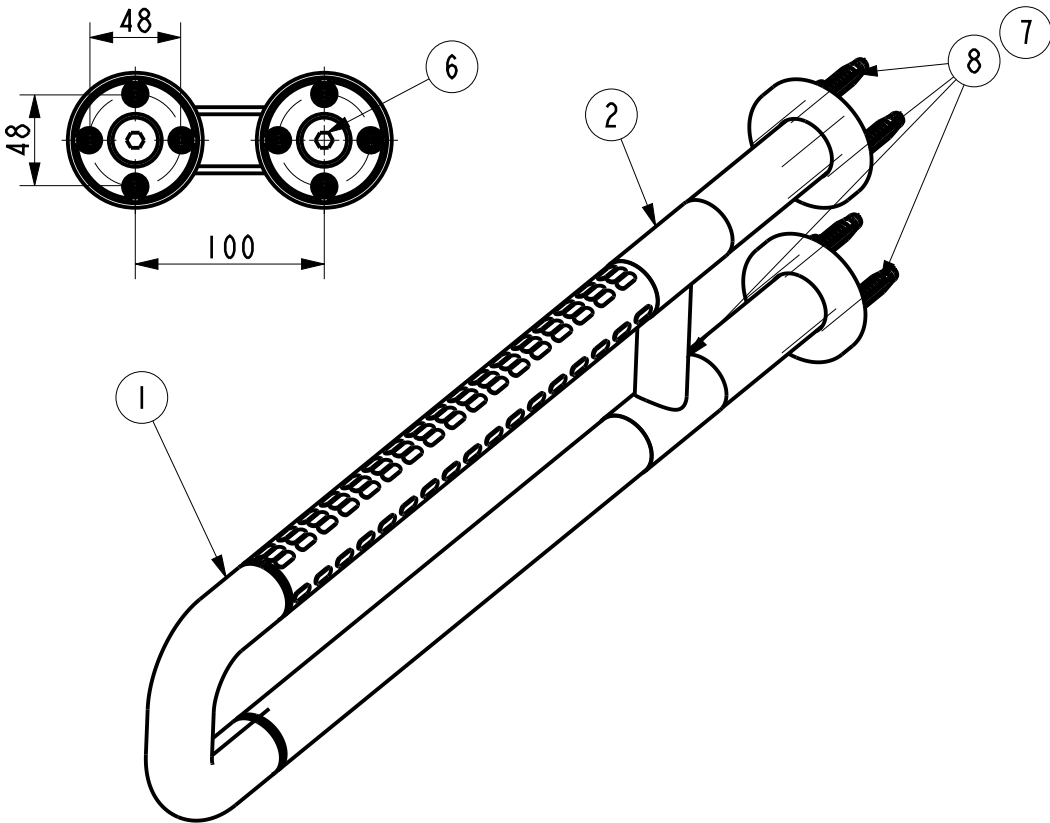

8	FF1-CN521Z9Z940208	膨胀套	8	NYLON	长度40mm,配合孔为c8
7	FF1-CN521Z9Z940207	自攻螺钉	8	SUS304	GB/T846 ST5.5X50
6	FF1-CN521Z9Z940206	固定座	2	SUS304	带内六角
5	FF1-CN521Z9Z940205	固定座底盖	2	NBR	
4	FF1-CN521Z9Z940204	固定座面盖	1	NYLON	
3	FF1-CN521Z9Z940203	固定座面盖	1	NYLON	带丝印商标
2	FF1-CN521Z9Z940202	H型支撑杆	1	SUS304	
1	FF1-CN521Z9Z940201	U型扶手	1	NYLON	
序号	物料代码	名称及描述	数量	材料	备注

DESIGNED			TITLE GRAB BAR C603	
CHECKED			REF	
APPROVED			CF-9402.000.04\多功能扶手(C603)	
SCALE	MATERIAL	WEIGHT	DWG NO.	American Standard
			FFAS9402-000040BC0	

REV	DESCRIPTION	DATE	NAME