


2024年6月19日

A/O

Tolerance, Unless Otherwise Stated, Is			
Above	0.5 to and including	6	±0.1
Excess	6 to and including	30	±0.2
Excess	30 to and including	120	±0.3
Excess	120 to and including	315	±0.5
Excess	315 to and including	1000	±0.8
Excess	1000 to and including	2000	±1.2

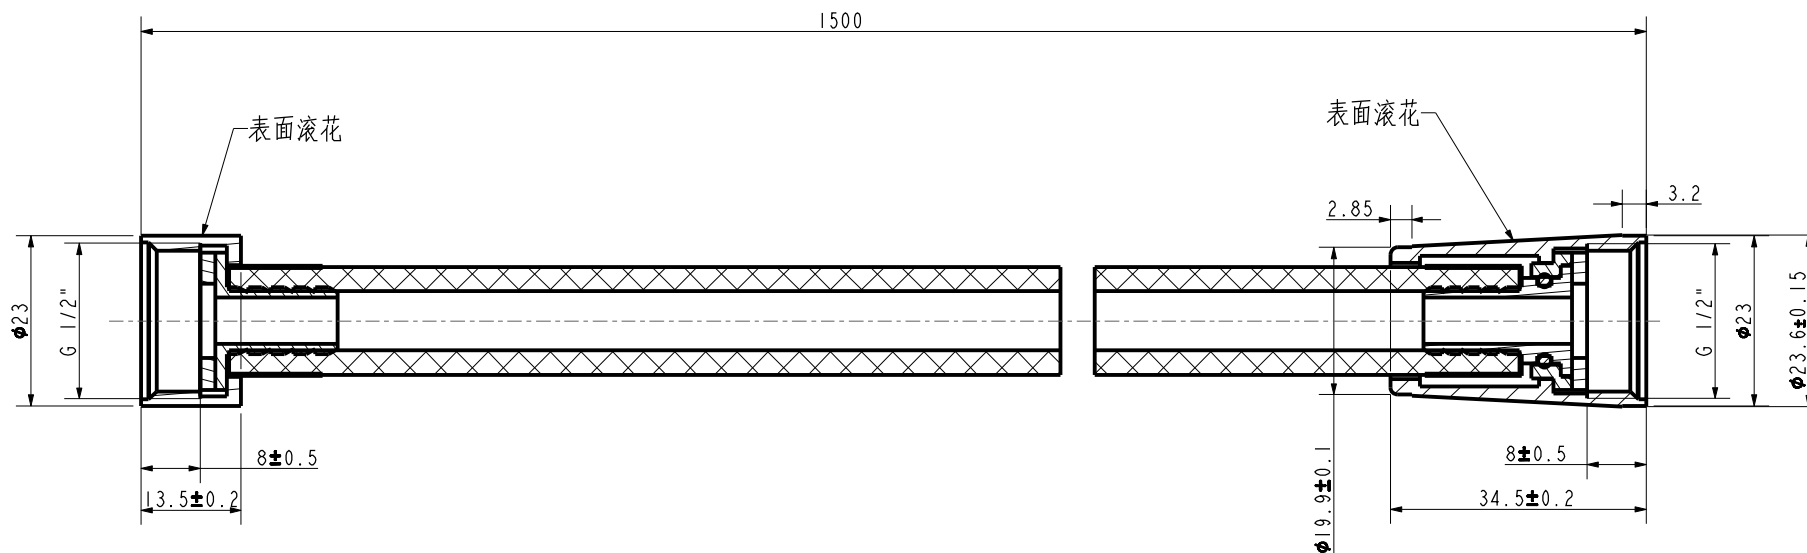

技术要求

1. 去毛刺
2. 螺纹通规通, 止规止
3. 两端为铜件, 中间是PVC, 颜色PVD温暖金
结构和G-28388GL8一样, 长度1.5m, 不含LOGO
4. 外观符合W110.0575
5. 功能符合W110.0407
6. 无塑包装, 两端接头用纸包好。

DESIGNED	利华沃	20240618	TITLE	1.5m PVC Twist-free Hose_DA0
CHECKED	张	2024.06.18	REF	防缠绕软管-1.5M-温暖金
APPROVED	李	2024.6.18.	DWG NO.	FFAS9127-000DA0BFO
SCALE	MATERIAL	WEIGHT	American Standard	

REV	DESCRIPTION	DATE	NAME