
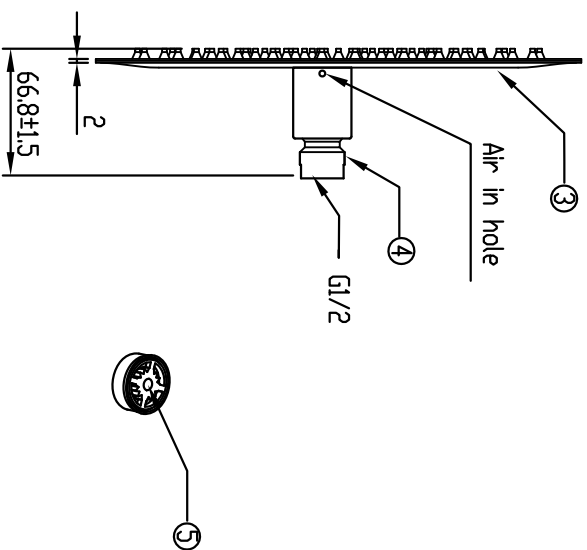


Manufactured by self	<input checked="" type="checkbox"/>	Manufactured by suppliers		Make die		Version	A0
----------------------	-------------------------------------	---------------------------	--	----------	--	---------	----

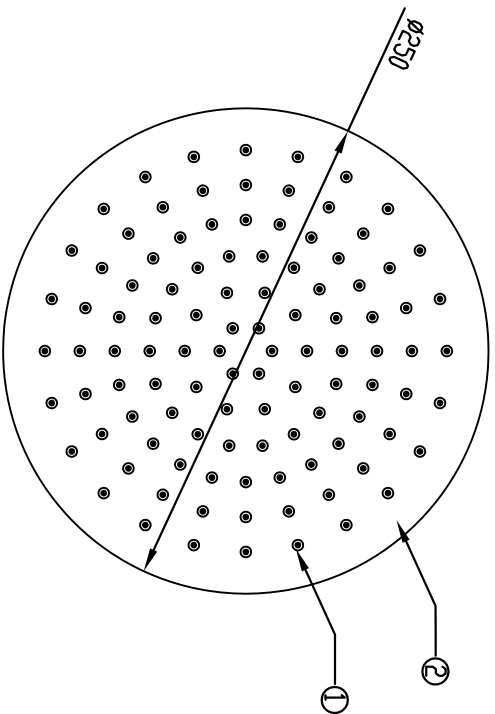

accessory 5 is optional for installation according to customer's need

Tolerance, unless otherwise stated: ISO-2678-MK

Line Tolerance:	0.5-6 6-30 30-120 120-400 400-1000	±0.1 ±0.2 ±0.3 ±0.5 ±0.8
Angle Tolerance:	≤10 10-50 50-120 120-400 >400	±1° ±30' ±20' ±10' ±5'
Chamfer:	0.5-3 3-6 >6	±0.2 ±0.5 ±0.3
Important Dimension Reference Dimension	*X, XXV (X, XXV)	

No.	Part Name	Part No	Material	Qty	Note
5.	Flow Restrictor	FNT 8.0	POM+NR	1	8.0 LPM
4.	Ball Joint	TQ019C	Cu-H59	1	
3.	Back Body	XC028C	stainless steel	1	
2.	Front Body	XC027C	stainless steel	1	
1.	Nozzle	RQ031H	Silicon	106	

Drawing	Design	Checked	Approved
JFQ005CP_AJ	JFQ005CP_AJ		
Part Name:	Part Name:	Part Name:	Part Name:
Stainless rain shower head	Stainless rain shower head	Stainless rain shower head	Stainless rain shower head
Round thin-10inch-Air in	Round thin-10inch-Air in	Round thin-10inch-Air in	Round thin-10inch-Air in

Triumph Rain