
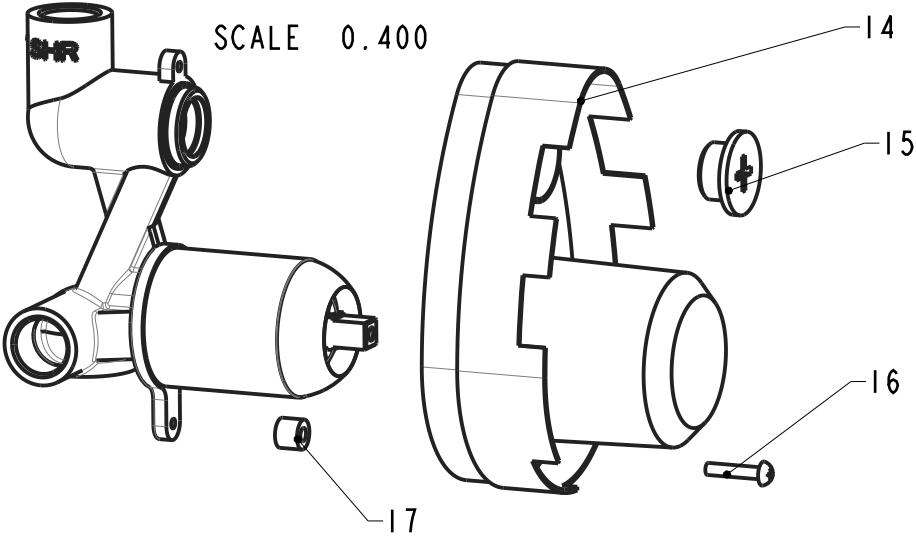
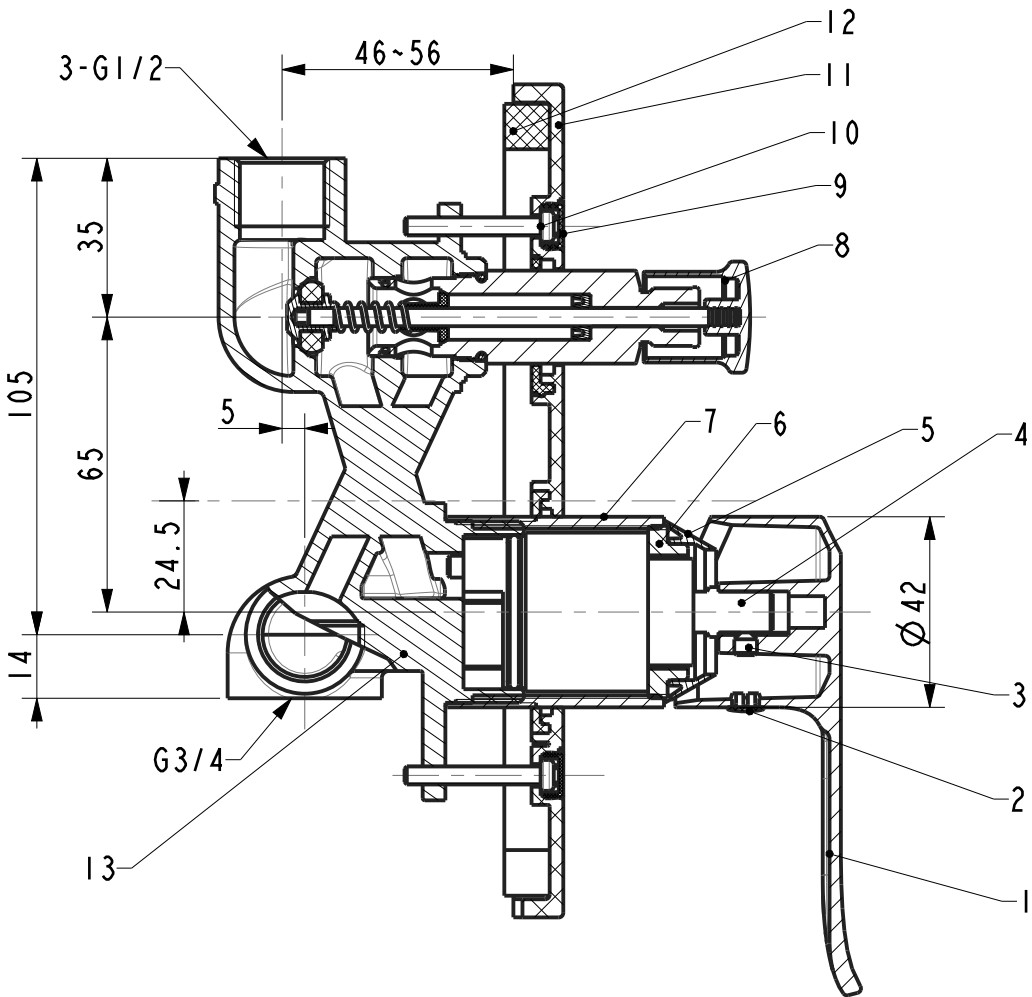


Tolerance, Unless Otherwise Stated, Is				
Above	0.5 to and including	6	±0.1	
Excess	6 to and including	30	±0.2	
Excess	30 to and including	120	±0.3	
Excess	120 to and including	315	±0.5	
Excess	315 to and including	1000	±0.8	
Excess	1000 to and including	2000	±1.2	

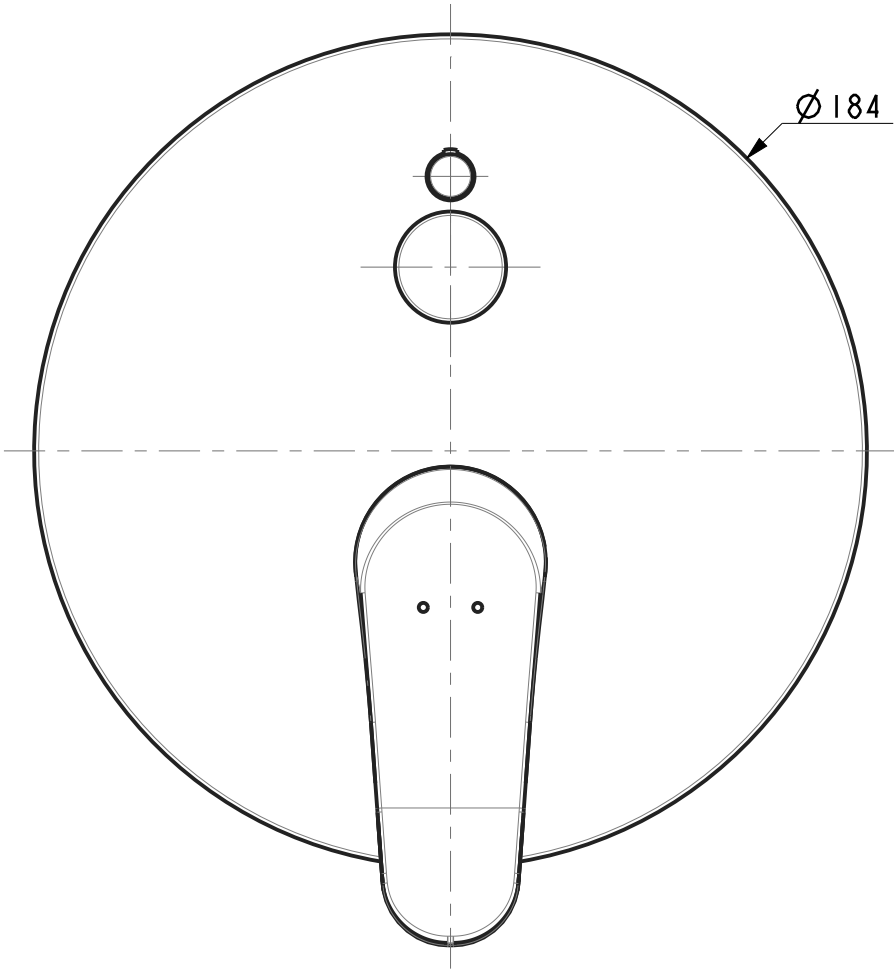

- Technical requirements:
1. Cartridge tightening torque is 8 ~ 10 N.M, and the other torque is implemented according to the "WI09.1520 assembly torque specification".
 2. The finished product should meet GB18145 and WI10.0504 final inspection standard.

17	FF1-CN521J00000338	Bushing	1	PA66	
16	FF1-CN521N00000268	Screw (M4X20)	1	SUS304	
15	FF1-CN521Z00000107	Protect Cover	1	PA	
14	FF1-CN521Z00000213	Protect Cover	1	PA	
13	FF1-CN521B00000052	Body	1	DZR	
12	FF1-CN521Z00000129	Foamed Plastic Washer	1	E. V. A	
11	FF1-CN521F00000139	Escutcheon	1	ABS	
10	FF1-CN521N00000185	Screw	2	SUS304	
9	FF1-CN521F00000244	Cover	2	ABS	

8	FF1-CN521J00000535	Diverter knob	1	HPb59-1	
	FF1-CN521X00000077	CYLINDRICAL PIN Assembly	1	Part	
	FF1-CN521J00000537	Diverter shaft $\varnothing 20.5 \times 73$	1	HPb59-1	
	FF1-CN521G00000354	Seal ring $\varnothing 11.7 \times 4$	1	NBR70	
	FF1-CN521G00000257	O ring 15.6*1.78	1	NBR70	
	FF1-CN521Z00000441	GUIDE $\varnothing 11 \times 11$	1	POM	
	FF1-CN521G00000113	O ring 13.5*1.5	1	NBR70	
	FF1-CN521Z00000178	Spring	1	SUS304	
7	FF1-CN521G00000347	Seal ring $\varnothing 15.8 \times 5$	1	NBR70	
	FF1-CN521J00000485	Cartridge bush	1	HPb59-1	
6	FF1-CN521N00000091	Cartridge Nut	1	HPb59-1	
5	FF1-CN521F00000042	Cartridge Cover	1	ABS	
4	FF1-CN521C00001399	Cartridge 35mm	1	Part	
3	FF1-CN521N00000899	Screw M5	1	SUS304	
2	FF1-CN521Z00000086	Handle Cover	1	ABS	
1	FF1-CN521L00000091	Handle	1	ZZnAl4-1	
No.	Part Code	Description	Qty	Material	Remark

DESIGNED		TITLE	
CHECKED		REF	
APPROVED		Neo Modern Concealed Bath & Shower Mixer	
SCALE	MATERIAL	WEIGHT	DWG NO.
3:5	Assembly		FFAS0721-609500BF0
REV		DESCRIPTION	
DATE		NAME	

American
Standard