
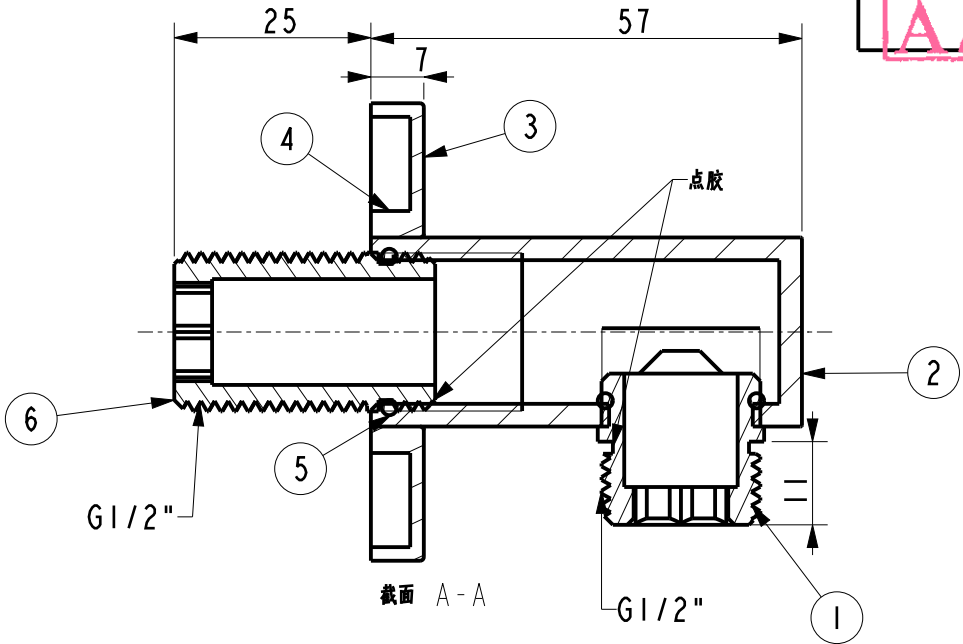
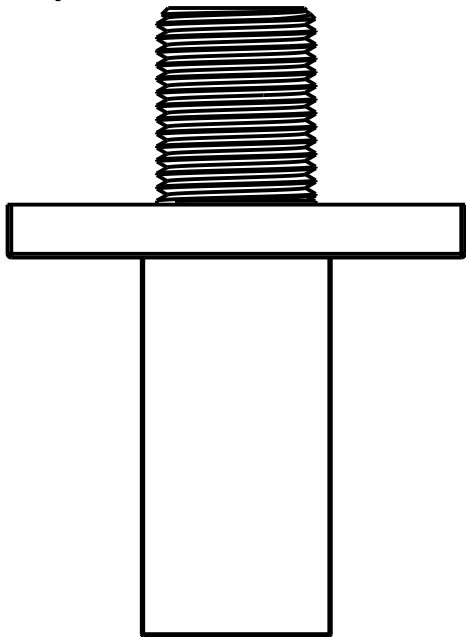


Tolerance, Unless Otherwise Stated. Is				
Above	0.5 to and including	6	±0.1	
Excess	6 to and including	30	±0.2	
Excess	30 to and including	120	±0.3	
Excess	120 to and including	315	±0.5	
Excess	315 to and including	1000	±0.8	
Excess	1000 to and including	2000	±1.2	

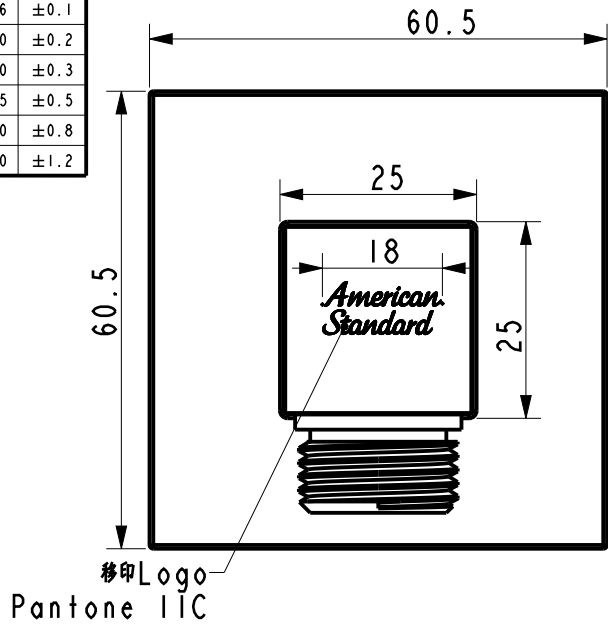

技术要求:

- 移印美标商标图案 位置如图示。字长18mm, 颜色pantone冷灰色11C
- 颜色零件符合《W110.0575_PVD外观检验标准》
- 移印符合《W110.4810_移印检验标准》
- 产品与现有成品FFAS9142-000500BC0尺寸相同, 颜色不同

6	FF1-CN521J0031650B	9142 连接接头	SUS304	1	
5	FF1-CN521G0012299P	O圈 (Φ20×Φ2)	NBR	2	
4	FF1-CN521G0012199P	9142 方形胶圈浅灰色	ABS	1	
3	FF1-CN521F00167DAP	9142 装饰盖_温暖金	ABS	1	温暖金
2	FF1-CN521B00049DAB	9142 墙座主体_温暖金	HPb59-1	1	温暖金
1	FF1-CN521J00315DAB	9142 出水接头_温暖金	SUS304	1	温暖金
NO.	Part NO.	Description	Material	QTY	Surface Treatment

DESIGNED	区振锋	20231120	TITLE Wall outlet - (G1/2")_DA0		
CHECKED	利华沃	20231120	REF 入墙花洒连接座_温暖金		
APPROVED	郭海忠	2023.11.20			
SCALE	MATERIAL	WEIGHT	DWG NO.		American Standard
			FFAS9142-000DA0BF0		

REV	DESCRIPTION	DATE	NAME