




Tolerance, Unless Otherwise Stated, Is			
Above	0.5 to and including	6	±0.1
Excess	6 to and including	30	±0.2
Excess	30 to and including	120	±0.3
Excess	120 to and including	315	±0.5
Excess	315 to and including	1000	±0.8
Excess	1000 to and including	2000	±1.2

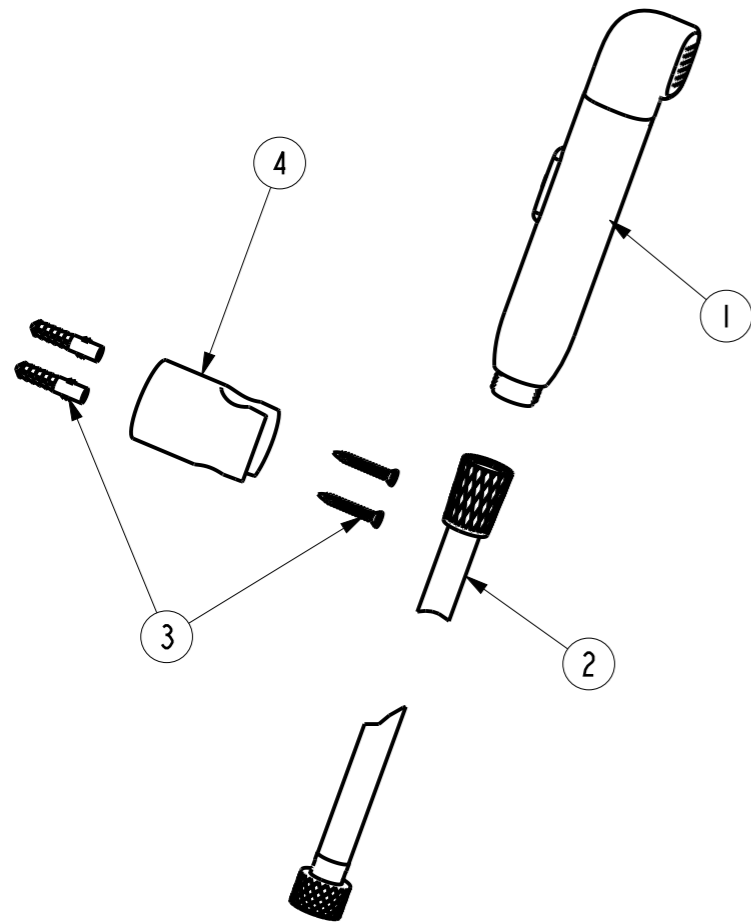

比例 0.300

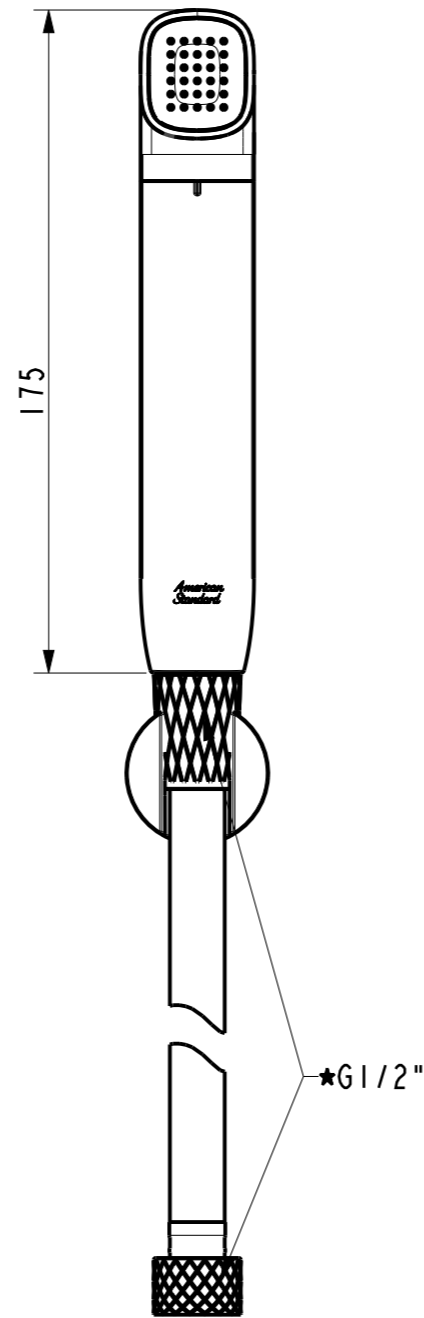

比例 0.500

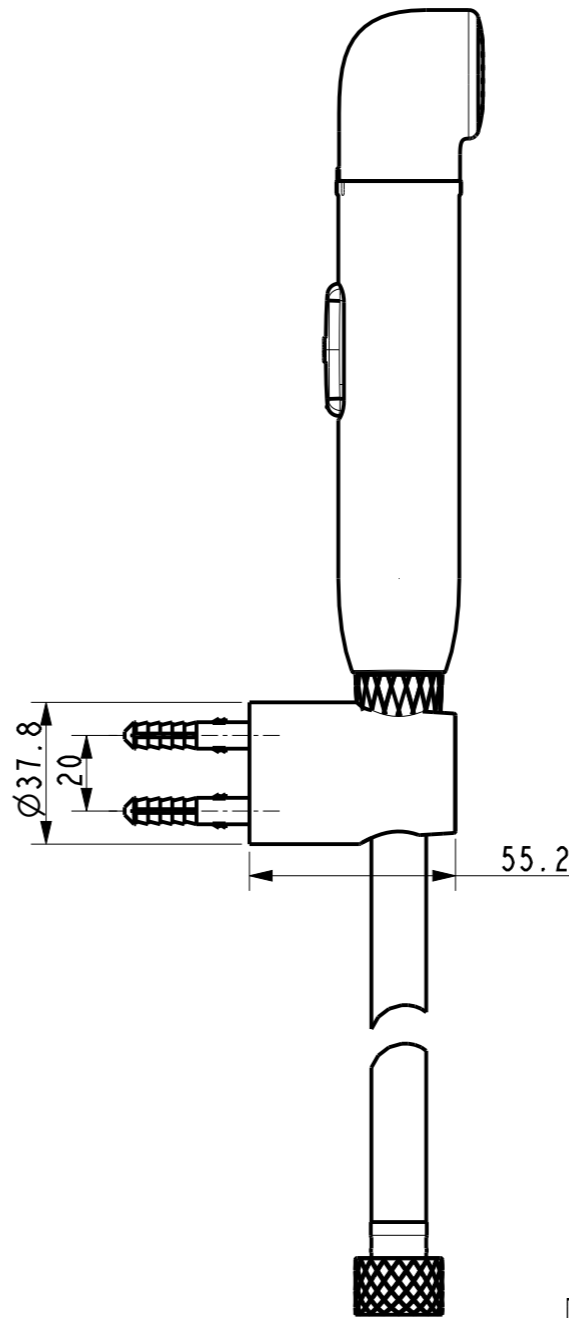

技术要求

- 零件外观清洁,不得有尖锐棱角、碰划伤、披风等缺陷,具体参看标准《W110.6264》的要求;
- 耐腐蚀性符合AASS,24H,10级;
- 螺纹表面不应有断牙、裂痕等明显缺陷、连接螺纹G1/2''通规通,止规止;
- 流量:在动压0.1Mpa下,2≤Q≤6L/Min;
- 密封性能(喷枪组件)
 - 1在17.5bar静压下,保持喷枪关闭60S不泄漏;
 - 2在5bar动压下切换按钮开关无泄漏;
 - 3在0.5bar动压下切换按钮开关无泄漏;
- 寿命(喷枪组件)10万次
试验过程中零件无断裂、卡顿、泄漏等现象
试验完成后密封性能满足5的要求
- (0.6±0.02)Mpa压力下,按钮操作力 ≤40N;
- 喷枪的其他要求符合《W110.6264》的要求;
- 带"★"为重点尺寸。

No.	Part No.	Part Name	Material	QTY	Remark
4	FF1-CN521T00099ALP	防缠绕PVC软管-1.2M (流云灰)	Assembly	1	ALO
3	FF1-CN521X00000012	1581742899\十字盘头自攻螺钉组件	Assembly	1	
2	FF1-CN521HAL000058	睿欧浴缸花洒支架 (流云灰)	Assembly	1	ALO
1	FF1-CN521H00076ALP	双功能小精灵喷枪 (流云灰)	Assembly	1	ALO+Glossy White

DESIGNED	李爽	2023.12.5	TITLE	DuoStiX Hygiene Spray-ALO	
CHECKED	段光政	2023.12.5	REF	双功能小精灵喷枪 (流云灰)	
APPROVED	李爽	2023.12.5	DWG NO.	FFASTS28-000AL0BF0	
SCALE	MATERIAL	WEIGHT	American Standard		
0.5					

REV	DESCRIPTION	DATE	NAME