
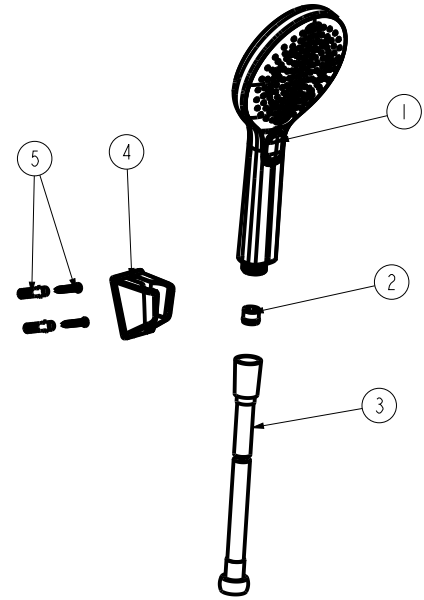


2025年10月11日
A/O

Tolerance, Unless Otherwise Stated. Is			
Above	0.5 to and including	6	±0.1
Excess	6 to and including	30	±0.2
Excess	30 to and including	120	±0.3
Excess	120 to and including	315	±0.5
Excess	315 to and including	1000	±0.8
Excess	1000 to and including	2000	±1.2

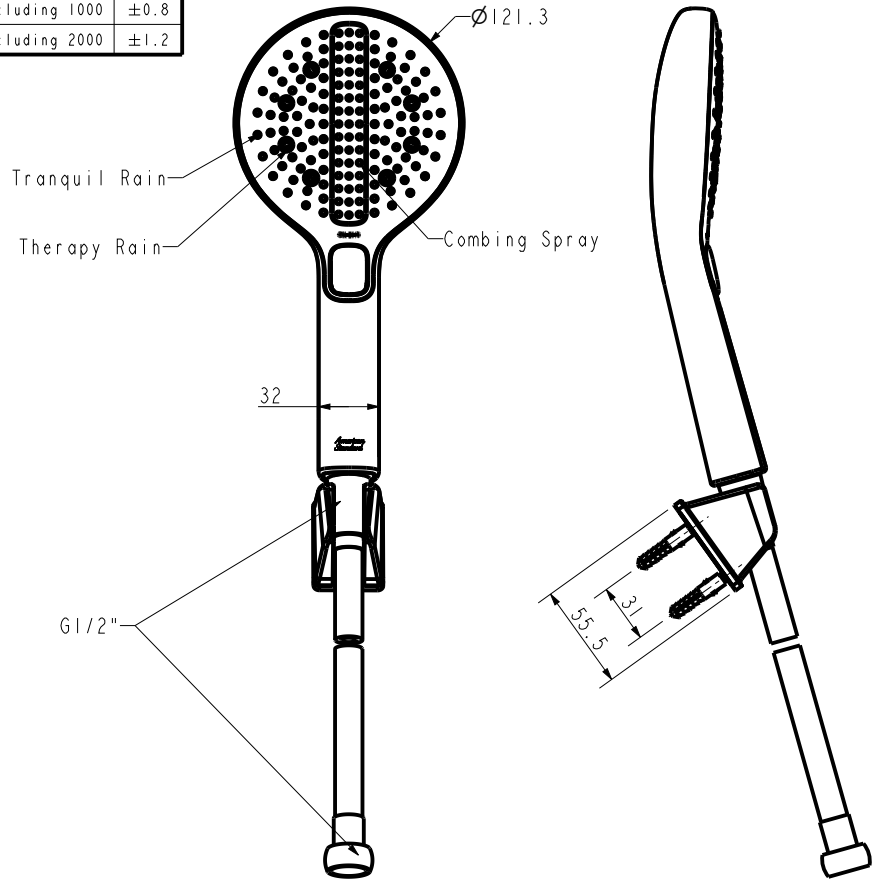

Note:
1.Hand shower is a three-function shower;
2.The hand shower body and decorative lid are ABS;
3.Hand shower comply with《W110.0406》;
4.Thread requirements through the gauge,
stop the gouge.

5	FFI-CN521X00000013	6inchEconomy Stainless SteelScrew	Assembly	I	
4	FFI-CN521HA0000055	RG Shower Hanger Sgl Hole T2-PHG	ABS	I	PVD_A00
3	FFI-CN521TA009450P	Hose	Assembly	I	PVD_A00
2	FFI-CN521Z0024699P	Flow Regulator 8.3L/min	Assembly	I	
1	420470A000	RainClick Combing 3F Hand Shower_PHG	Assembly	I	PVD_A00
No.	Part No	Part Name	Material	QYT	Remark

DESIGNED	梁嘉豪	2025.10.9	TITLE	RainClick Combing 3F HandShower_PHG/APAC	
CHECKED	国光强	2025.10.9	REF	摩托多功能手持花洒(120mm)_星河灰(软管&支架)/亚太	
APPROVED	郭子龙	2025.10.9.			
SCALE	MATERIAL	WEIGHT	DWG NO.	American Standard	
1:5	Assembly		135122A000		

REV	DESCRIPTION	DATE	NAME