To ensure that your installation proceeds smoothly,
please read this instructions carefully before you begin.

American Standard

STUDIO SAGA


1097920000
STUDIO/SAGA TUBULAR SINK MIXER CP (4*)



Installation &
Operation Instruction

Dimension

Unit: mm

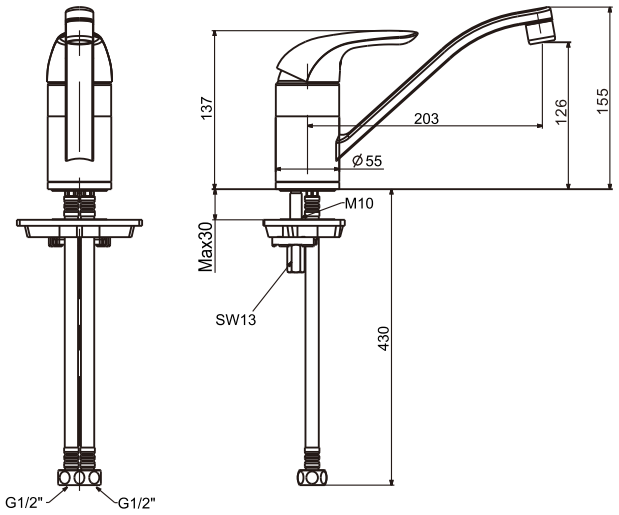


Installation


1




A Remove all impurity in pipes before beginning to avoid clogging.

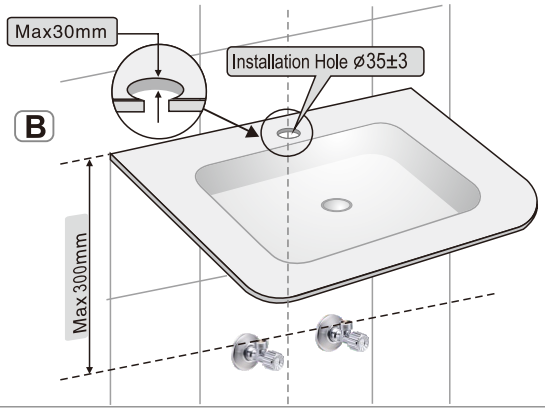


2

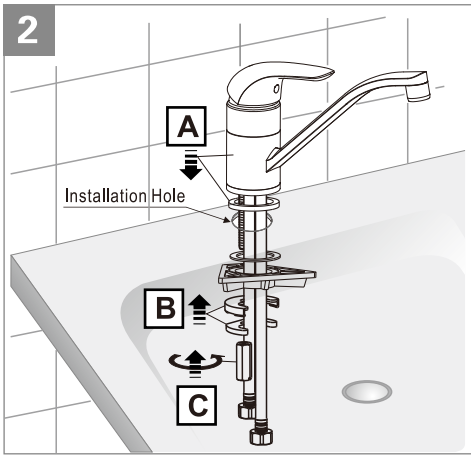

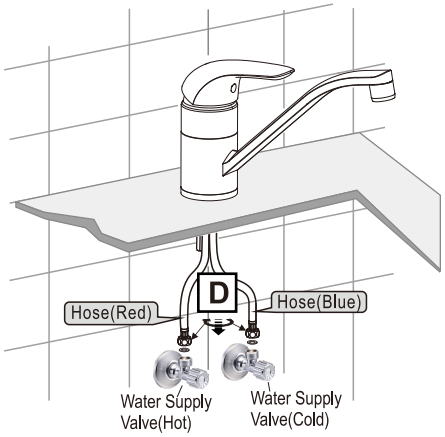

Parts List

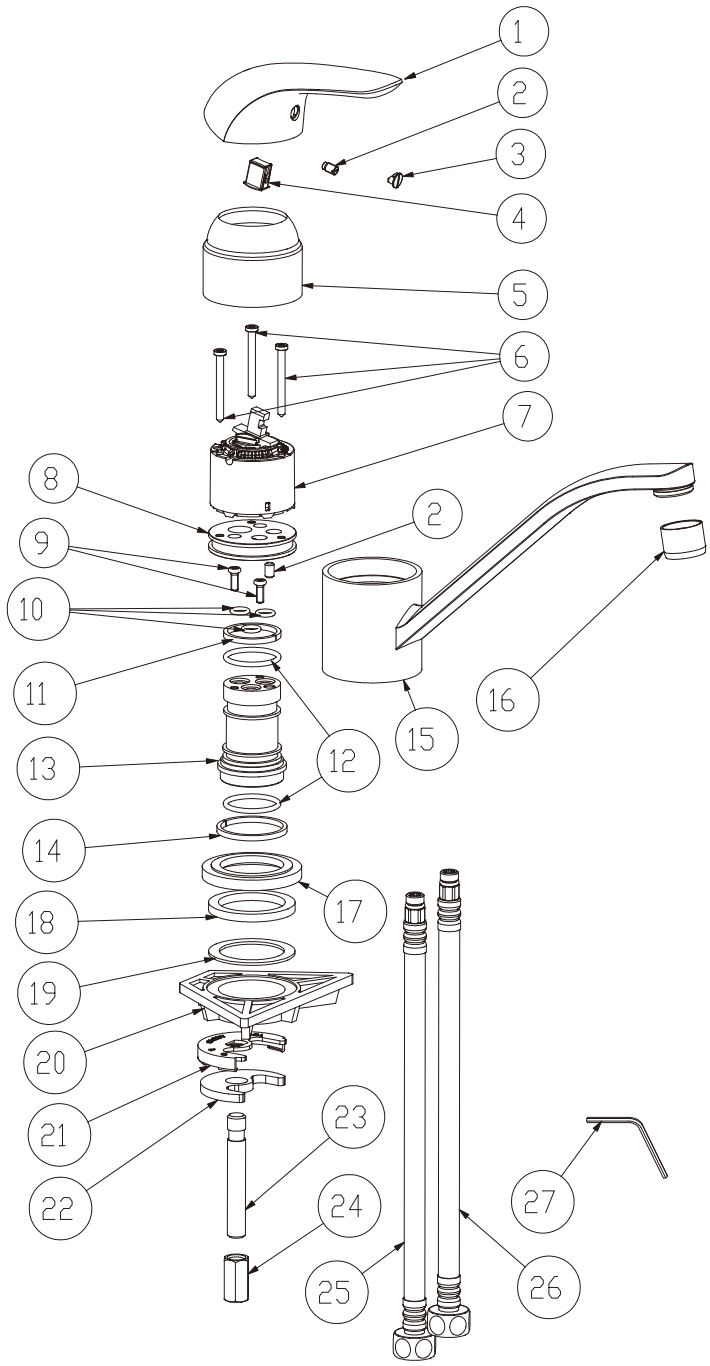

No.	Part Name	Q'ty
1	Handle	1
2	Handle Screw	1
3	Index	1
4	Bushing	1
5	Cartridge Cap	1
6	Cartridge Screw	3
7	Cartridge	1
8	Adapter	1
9	Locking Screw	2
10	O–Ring	3
11	Ring	1
12	O–Ring	2
13	Manifold	1
14	Ring	1
15	Spout	1
16	Aerator	1
17	Install Ring	1
18	Packing	1
19	Set Packing	1
20	Holding Plate	1
21	Washer	1
22	Plate	1
23	Bolt	1
24	Locking Nut	1
25	Flexible Hose (Red)	1
26	Flexible Hose (Blue)	1
27	L–Wrench	1

Notice

- Mixer meets the lead free requirements of NCC vol 3
- Mixer must be installed to the requirement of AS/NZS 3500 by a qualified plumber
- Flush out new pipe work prior to connecting the new mixer
- Check installation distance in the dimension diagram to ensure correct installation

Conditions for use

- Recommended equal water pressure – 100Kpa to 500Kpa
- Maximum hot water temperature 65℃
- Flow controller must be tightened to prevent removal from hand

WATER RATING
www.waterrating.gov.au
7.5 litres per minute
Licence No. 0050
Lead Free
AS 3718
WMKA21318