

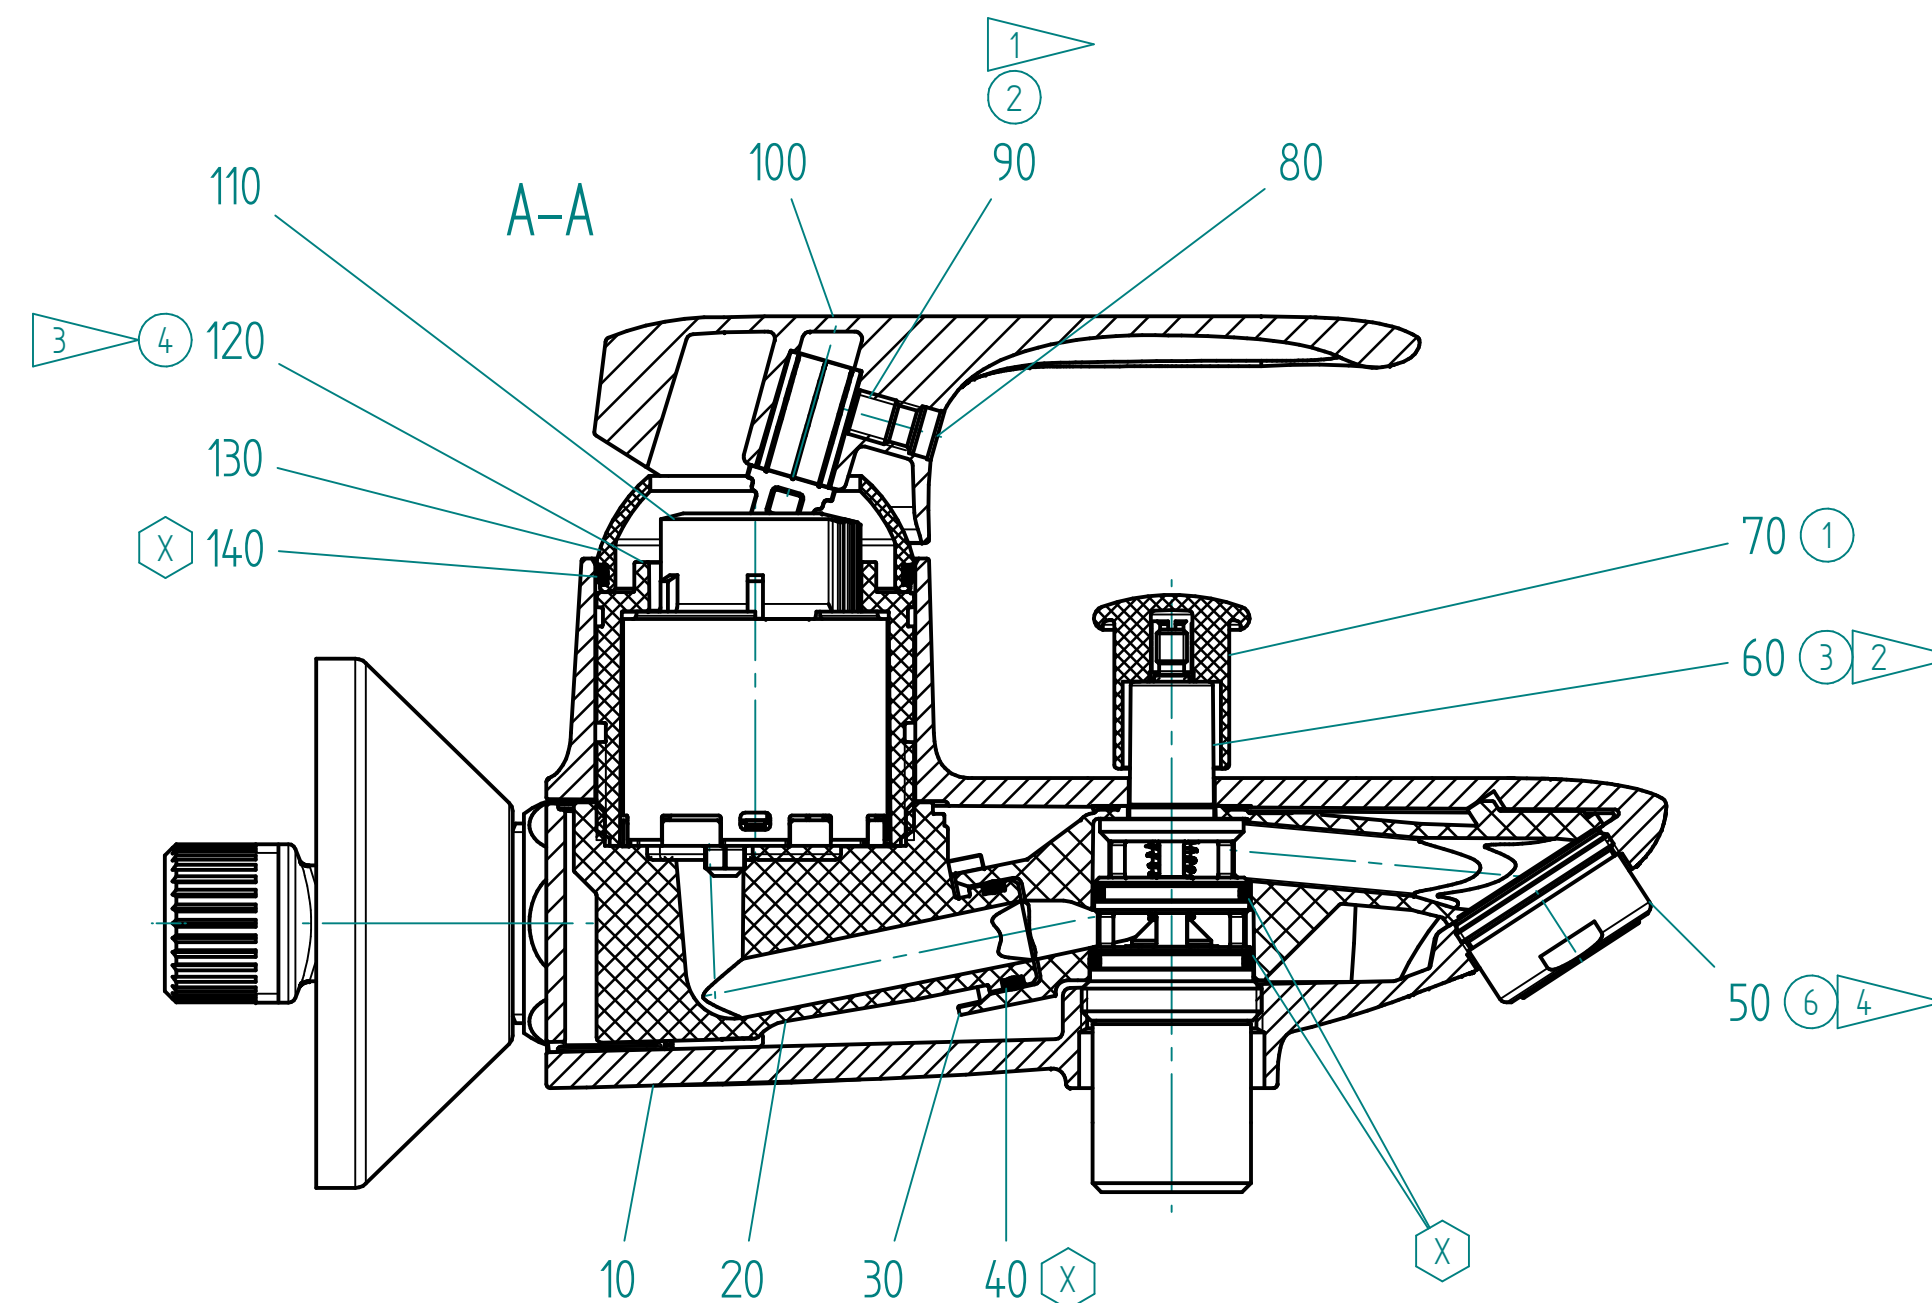
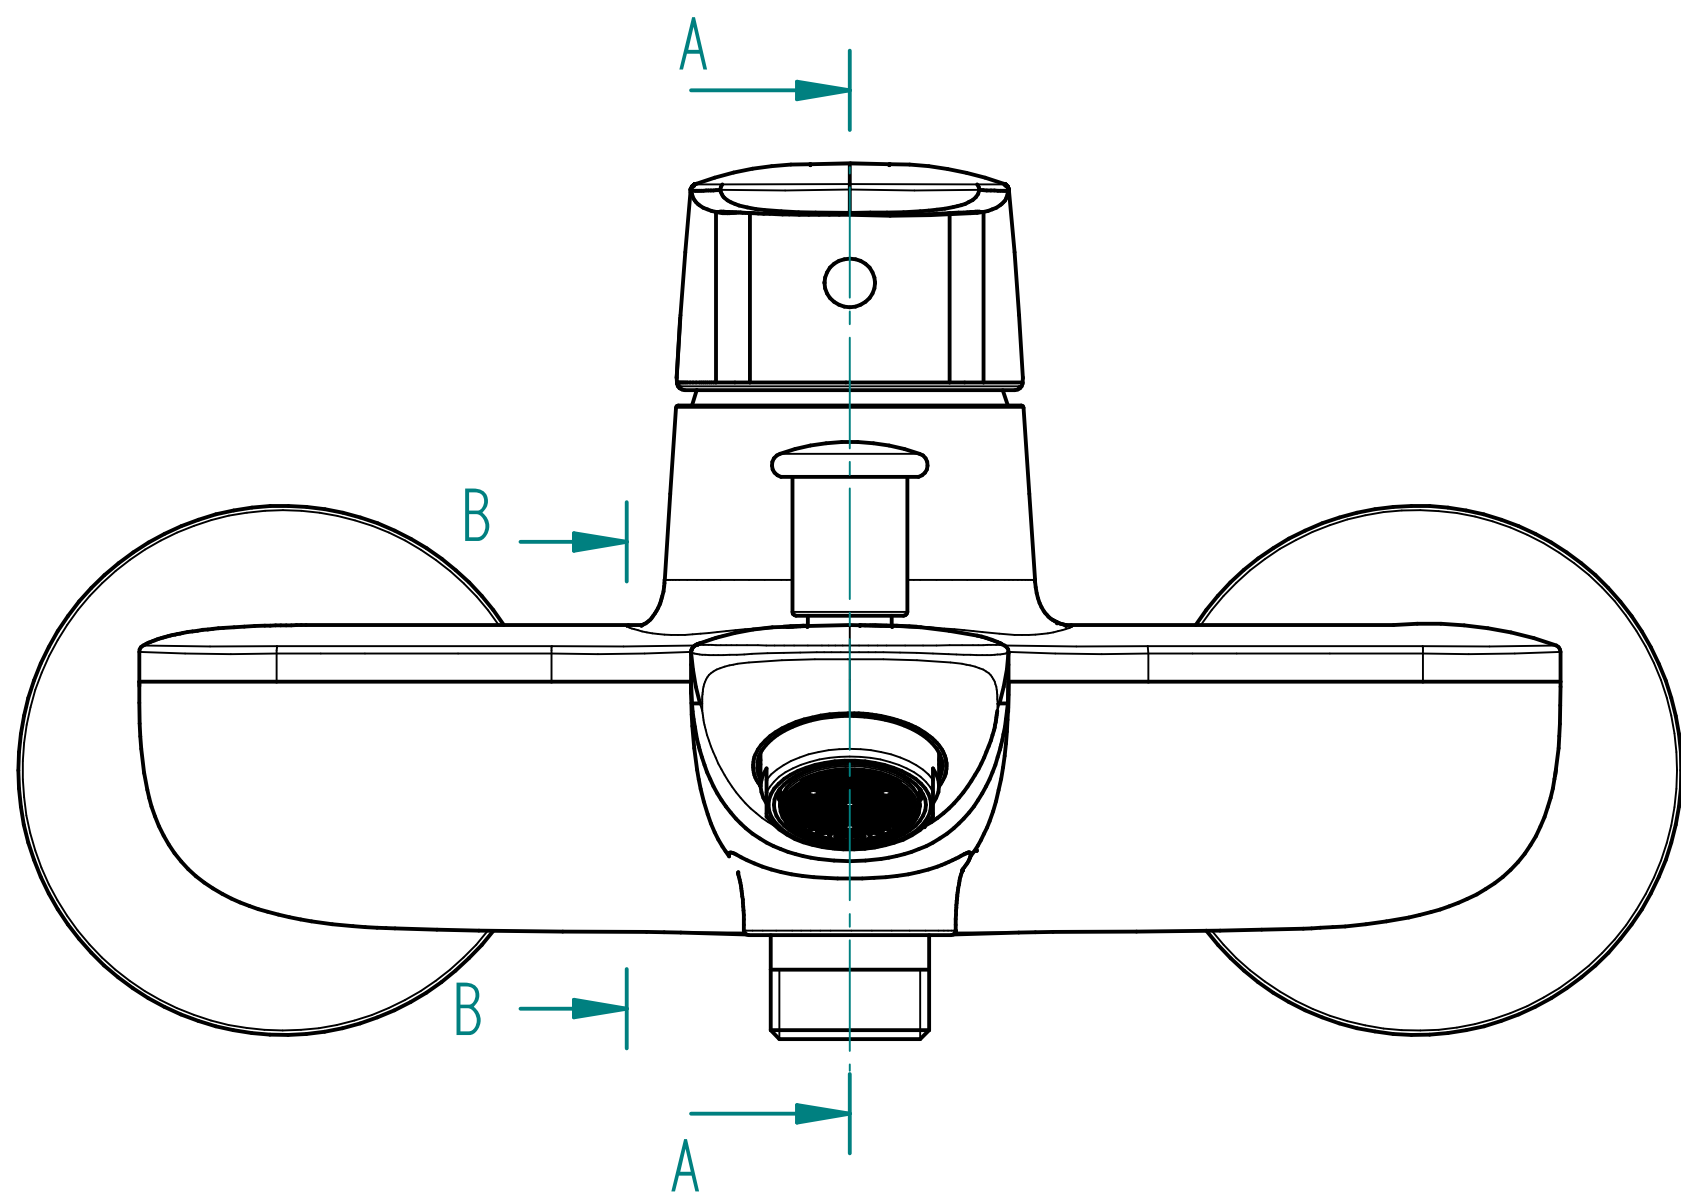


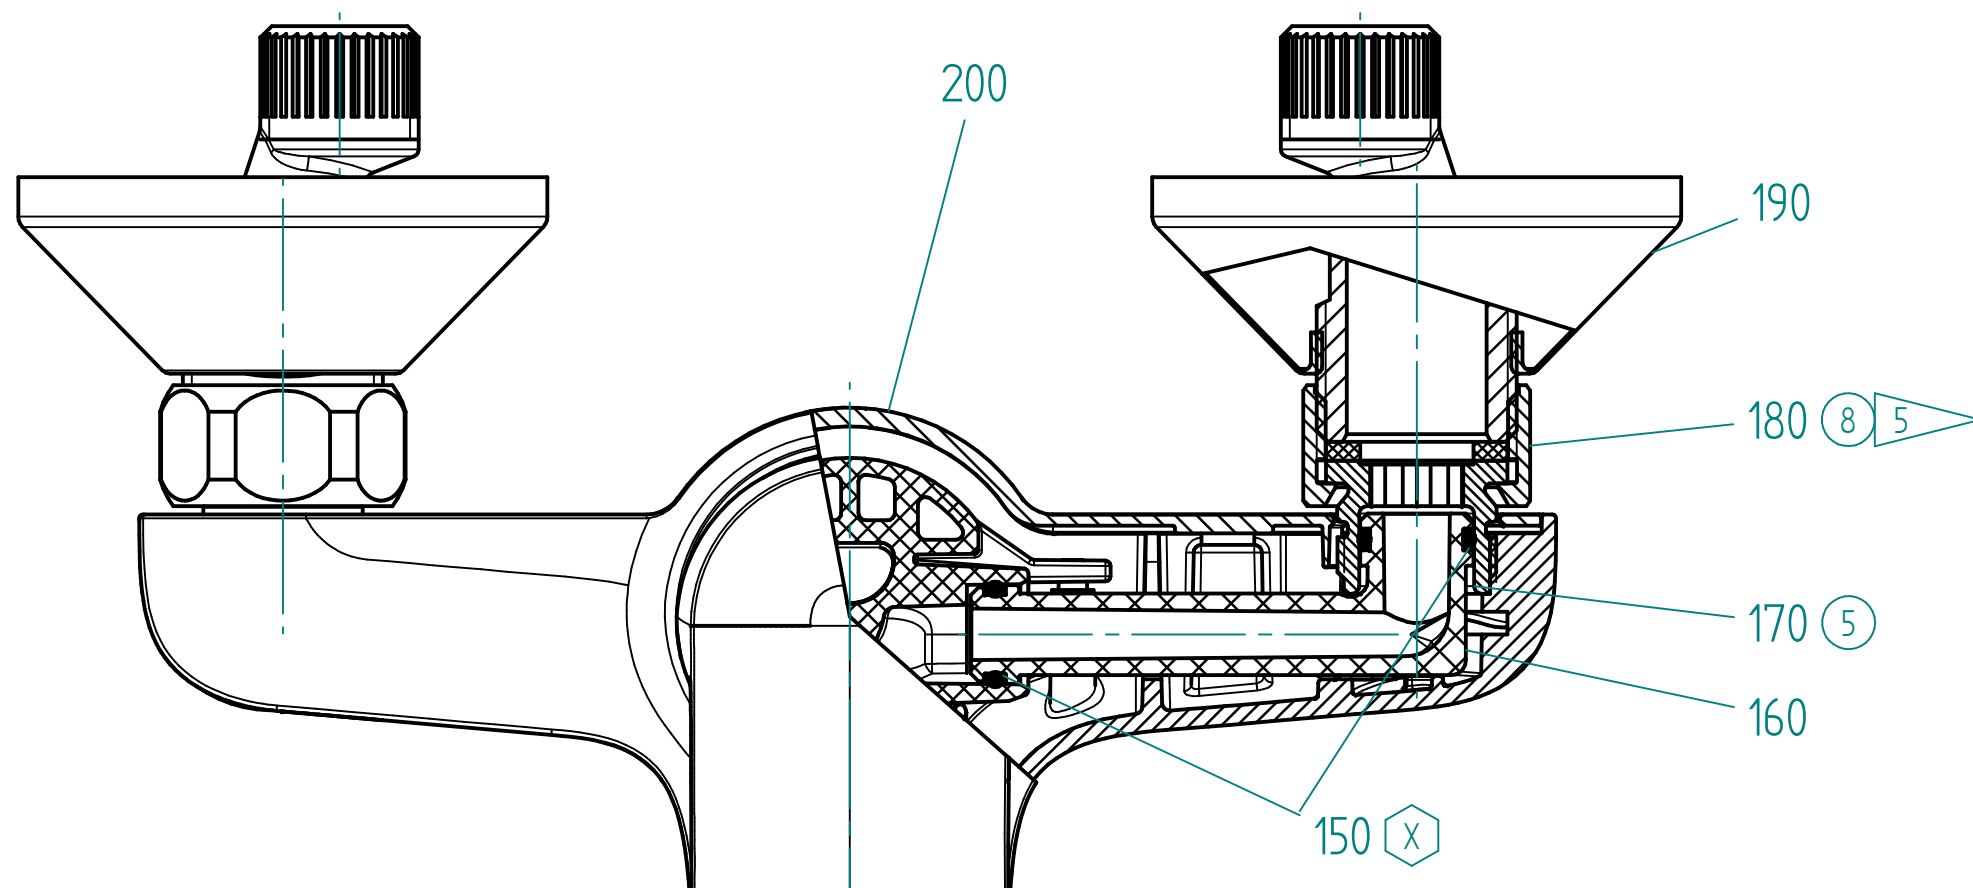


B-B

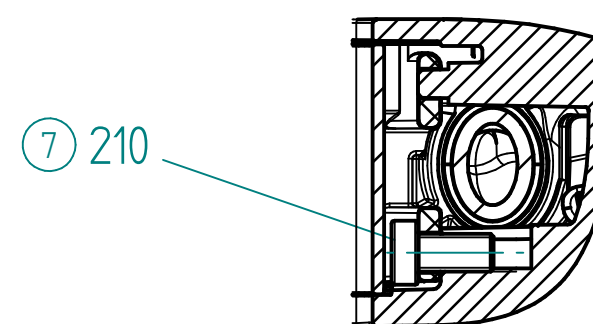

Anzugsmomente:
TIGHTENING TORQUE:

- ① = 70 ... 80 Ncm Kategorie C gem. GSO-011.0.1001
70 ... 80 Ncm CLASS C ACC. GSO-011.0.1001
- ② = Anzugsmoment gem. GSO-011.0.1001 Schraubfall L3
TIGHTENING TORQUE ACC. TO GSO-011.0.1001 SCREWDRIVING CONDITION L3
- ③ = Anzugsmoment gem. GSO-011.0.1001 Schraubfall D1
TIGHTENING TORQUE ACC. TO GSO-011.0.1001 SCREWDRIVING CONDITION D1
- ④ = Anzugsmoment gem. GSO-011.0.1001 Schraubfall C18
TIGHTENING TORQUE ACC. TO GSO-011.0.1001 SCREWDRIVING CONDITION C18
- ⑤ = Anzugsmoment gem. GSO-011.0.1001 Schraubfall N2
TIGHTENING TORQUE ACC. TO GSO-011.0.1001 SCREWDRIVING CONDITION N2
- ⑥ = Anzugsmoment gem. GSO-011.0.1001 Schraubfall S1
TIGHTENING TORQUE ACC. TO GSO-011.0.1001 SCREWDRIVING CONDITION S1
- ⑦ = 350 ... 400 Ncm Kategorie B gem. GSO-011.0.1001
350 ... 400 Ncm CLASS B ACC. GSO-011.0.1001
- ⑧ = Anzugsmoment gem. GSO-011.0.1001 Schraubfall U1
TIGHTENING TORQUE ACC. TO GSO-011.0.1001 SCREWDRIVING CONDITION U1

X = gefettet gemäß Stückliste Pos. 700
LUBRICATED ACC. TO BOM POS. 700

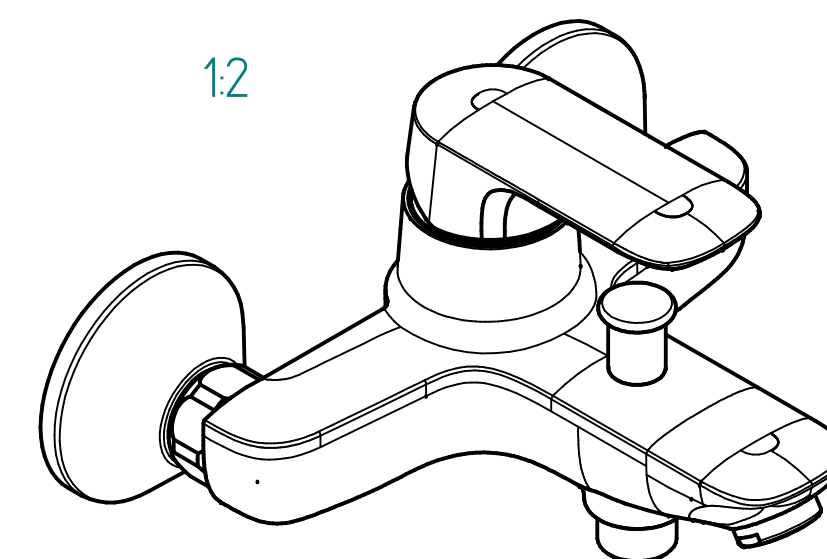

ÄM-Nr. / EON	253363			Volume [cm³]:	Material:
Index					
Anzahl / Quantity				Maßstab / Scale	DIN-Material No.:
Datum / Date	20.04.2022			1:1	
Verantw. / Respons.	Rakesh				
Geprüft / Approved	Langer				
Normgepr. / To standard					
Copyright reserved	Status:				
Size: A2					
EHM, WAN- OHM BATH Metrica				Zeichnung Nr. / Drawing No.: FFAS1M11-601500BF0	
				Ersatz für / Replaces:	

