


To ensure that your installation proceeds smoothly,
please read this instructions carefully before you begin.

American Standard


Signature

FFAS1721-609500ZNO
Concealed Bath & Shower Mixer


FFAS1722-709500ZNO
Concealed Shower Mixer



FFAS1721-609500ZNO



FFAS1722-709500ZNO




Installation &
Operation Instruction


Dimension

Unit: mm

FFAS1721-609500ZNO


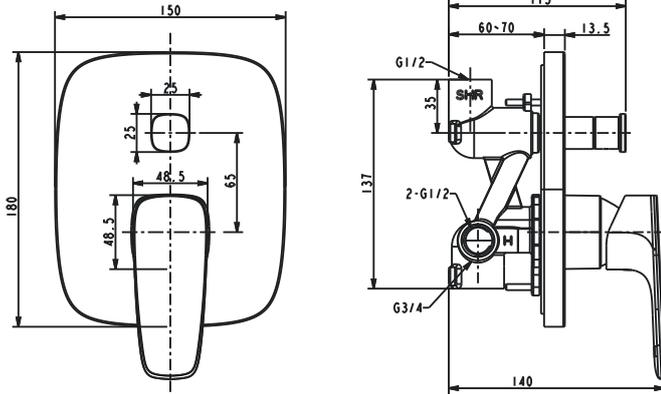


FFAS1722-709500ZNO


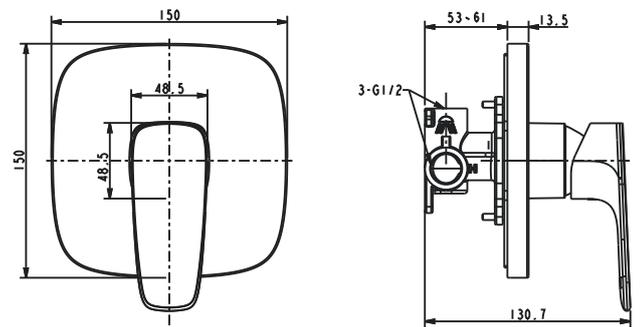


Installation


1 Body Installation

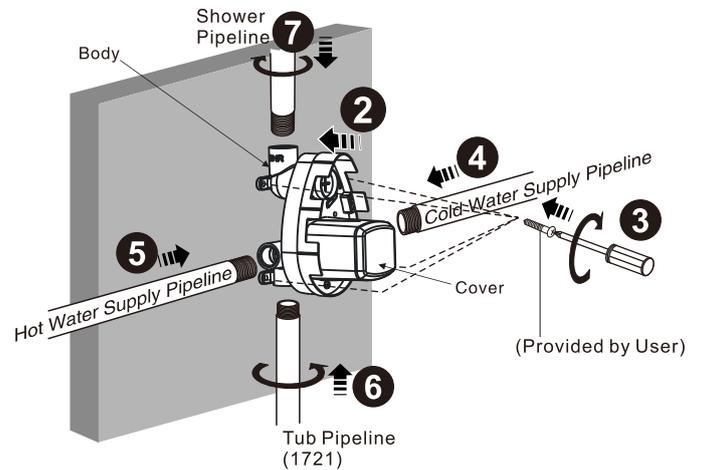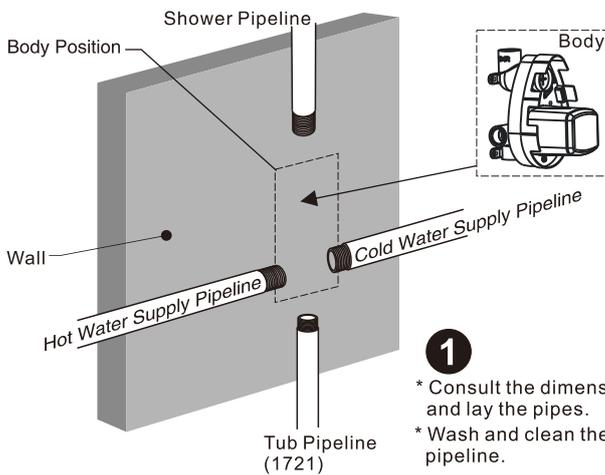





2 Finishing Wall

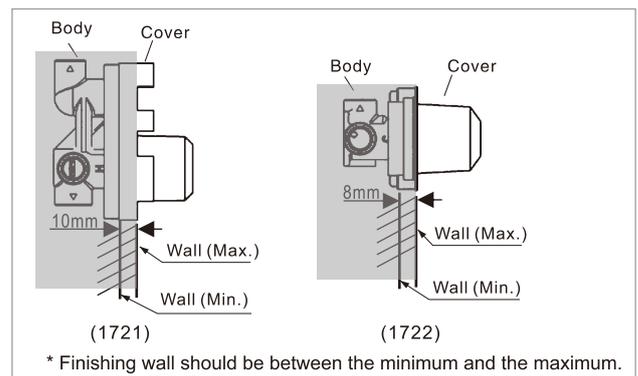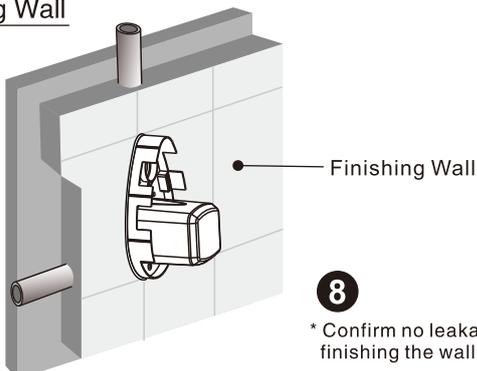

3 Escutcheon & Lever Installation

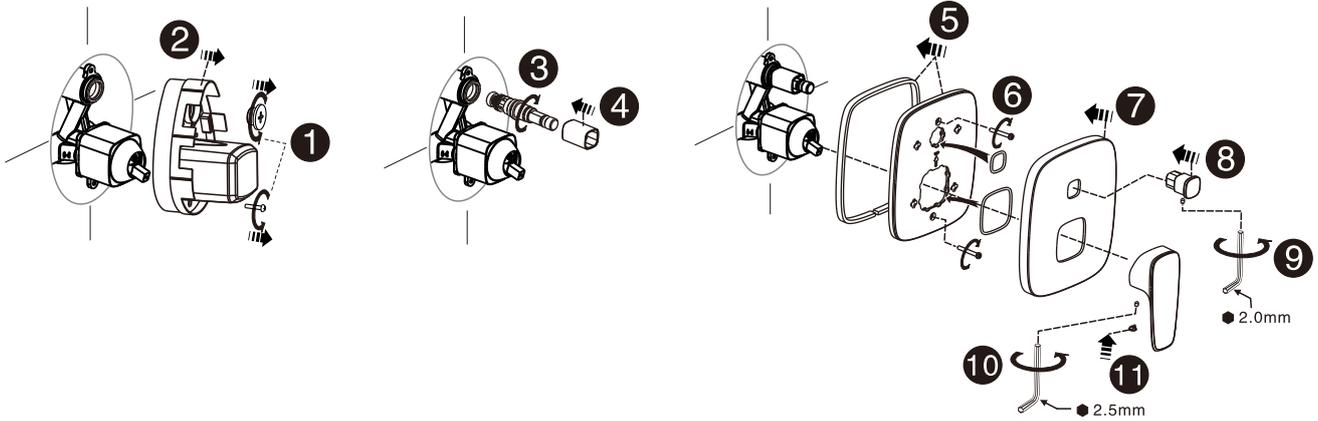

Parts List

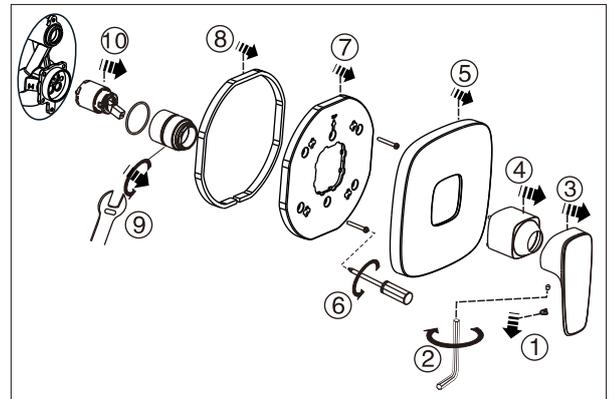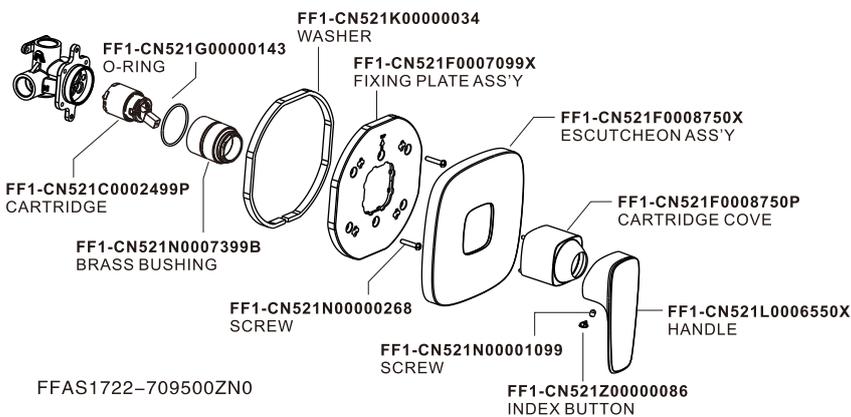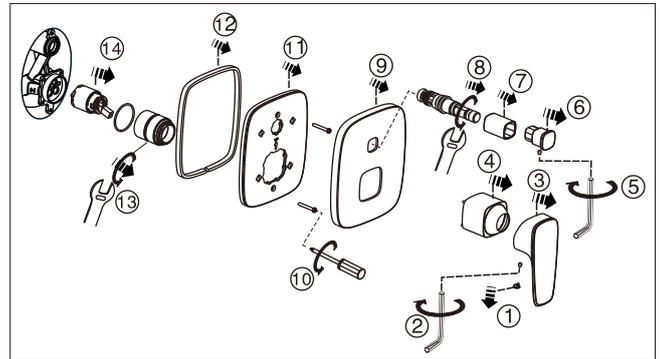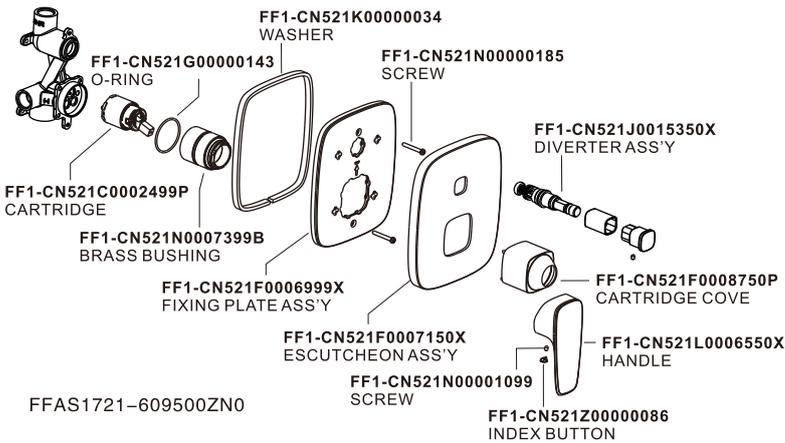

Notice

- * Remove all impurity in pipes before beginning to avoid clogging. Connect faucet pipes correctly.
- * Check installation distances in the Dimension diagram to ensure correct installation.

Conditions for use

- * Water pressure condition: 0.05~0.75MPa (Recommended water pressure condition: 0.1~0.5MPa)
(When exceed 0.5MPa, it is strongly advised to fit pressure limiting valve)
- * Ambient temperature: 1~55°C
- * Water temperature: 4°C ~ 90°C (Recommended hot water temperature 50~60°C)
- * Steam should not be used with product.
- * Note: Ensure water source is clean. Poor water quality can cause cartridge and internal components to clog, resulting in poor volume control and/ or product failure.

AUS

Reece Australia Pty Ltd
 118 Burwood Hwy
 Burwood VIC 3125
 Tel.: 1800 080 055
 Email: customer@reece.com.au



NZ

Robertson
 25 Vestey Drive
 Mt Wellington, Auckland
 Tel.: +64 9 5730490
 Email: sales@robertson.co.nz