

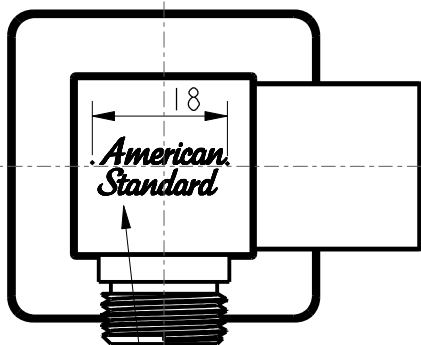
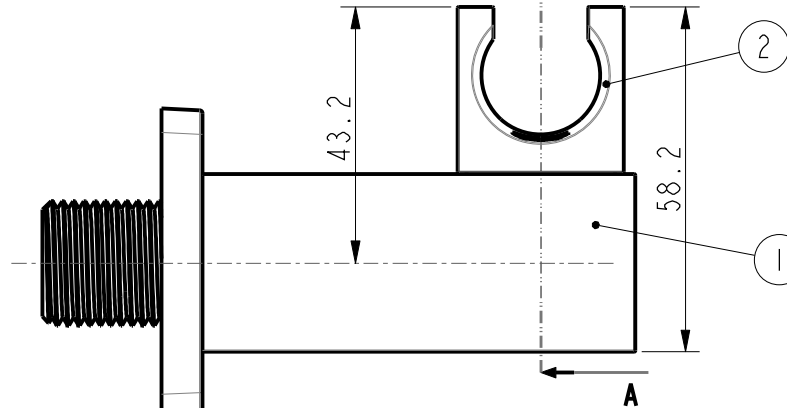


Tolerance, Unless Otherwise Stated, Is				
Above	0.5 to and including	6	±0.1	
Excess	6 to and including	30	±0.2	
Excess	30 to and including	120	±0.3	
Excess	120 to and including	315	±0.5	
Excess	315 to and including	1000	±0.8	
Excess	1000 to and including	2000	±1.2	

2023年7月18日
A/O

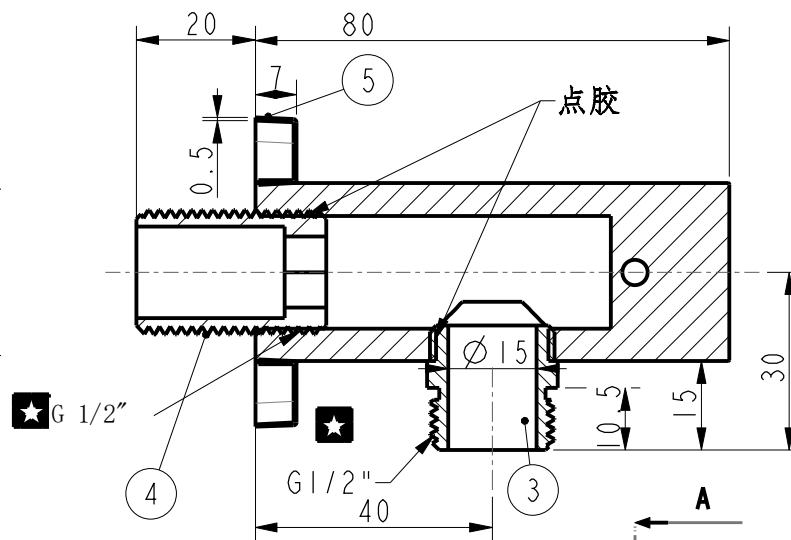

移印Logo
Pantone冷灰色11C

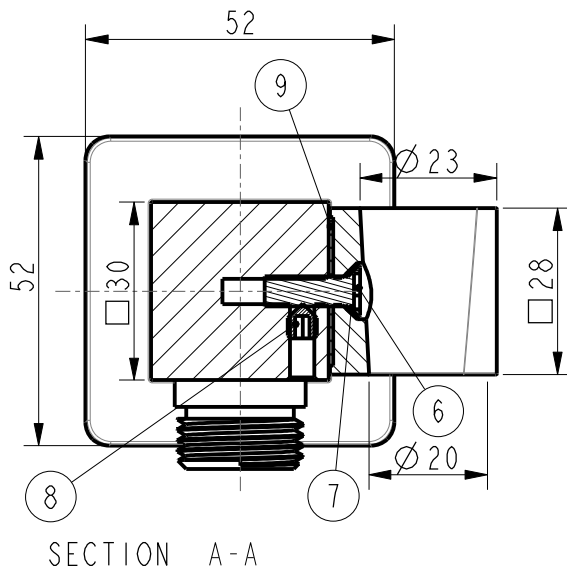

9	垫片	PA66	1	白色
8	M5螺钉	SUS304	1	
7	尼龙衬套	PA66	1	白色
6	十字螺钉	SUS304	1	
5	装饰盖	HPB59-I	1	温暖金
4	连接接头	HPB59-I	1	
3	出水接头	HPB59-I	1	温暖金
2	花洒支座	HPB59-I	1	温暖金
1	墙座主体	HPB59-I	1	温暖金
序号	名称	材料	数量	备注

技术要求

- 移印美标商标图案,位置如图示,字长18mm,颜色Pantone冷灰色11C;
- 墙出接头需能承受6Kg气压1分钟,无渗漏;
- 美标彩盒包装,一个内盒装一个产品,一个外箱可以装多个内盒,但外箱总重量不得超过20Kg;
- 带"★"为重要尺寸;螺纹要求通规通,止规止;
- 颜色零件符合《WI10.0575_PVD外观检验标准》
- 移印符合《WI10.4810_移印检验标准》
- 产品与现有成品FFAS9143-000500BC0尺寸相同,颜色不同。

DESIGNED	利华沃	20230713	TITLE Square Wall Outlet With Holder _DAO	
CHECKED	2023.07.13	2023.07.13	REF	
APPROVED	2023.7.13	2023.7.13	入墙方形手持花洒接头带花洒支座_温暖金	
SCALE	MATERIAL	WEIGHT	DWG NO.	American Standard
1:1			FFAS9143-000DAOBF0	

REV	DESCRIPTION	DATE	NAME