


2023年3月20日
A/O


Tolerance, Unless Otherwise Stated, Is			
Above 0.5 to and including 6	6		±0.1
Excess 6 to and including 30	30		±0.2
Excess 30 to and including 120	120		±0.3
Excess 120 to and including 315	315		±0.5
Excess 315 to and including 1000	1000		±0.8
Excess 1000 to and including 2000	2000		±1.2

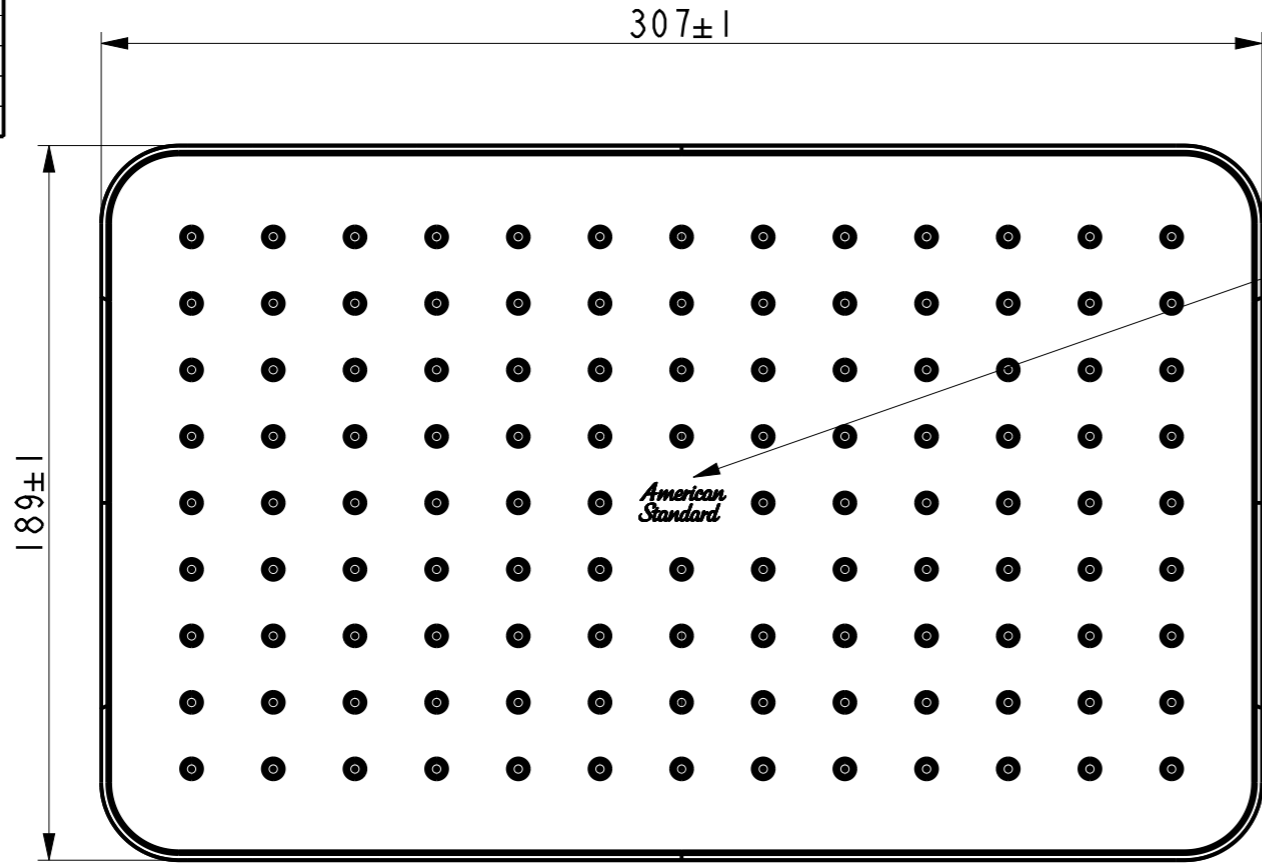

美标Logo居中 长度22mm 高度9.9mm

技术要求

1. 顶洒在如图所示位置丝印美标Logo;
2. 各棱边无毛刺, 合缝口紧密, 各表面不得有凹痕、划伤、断牙等明显缺陷。
3. Logo色卡 Pantone冷灰色5C, 出水胶头颜色直接塑料形成颜色Matt Black.
4. 在动水压0.1MPa下 顶洒出水最大流量Q要求为 4.2L/min ≤ Q ≤ 8L/min.
5. 花洒的其他相关性能须符合《W110.0406内控标准 - 花洒》要求。
6. 零件表面处理符合《W110.0589_内部检验标准 - 装饰性喷漆表面》。
7. 此产品与FF1-CN521H0005650P尺寸一样, 颜色不同。

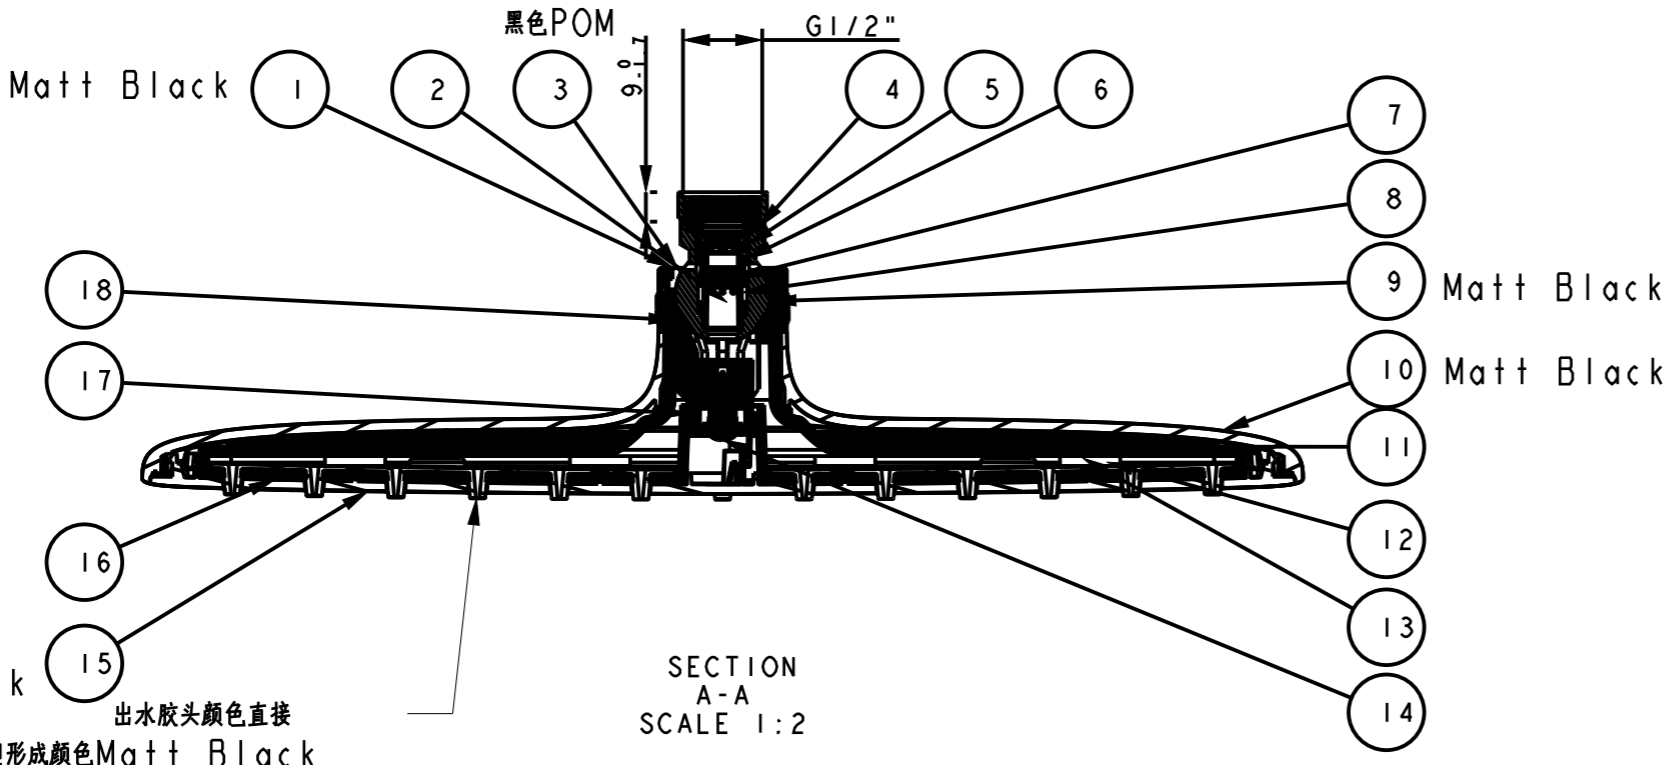

SECTION A-A
SCALE 1:2

NO.	DWG NO.	NAME	U.	/QTY	REMARK
18	FF1-CN521H0005644P-18	Washer	PCS	1	EPDM
17	FF1-CN521H0005644P-17	O ring	PCS	1	NBR70
16	FF1-CN521H0005644P-16	Cover for TPR	PCS	1	ABS+TPR
15	FF1-CN521H0005644P-15	Cover	PCS	1	ABS/MattBlack
14	FF1-CN521H0005644P-14	Screw	PCS	1	SUS304
13	FF1-CN521H0005644P-13	Screw	PCS	8	SUS304
12	FF1-CN521H0005644P-12	O ring	PCS	8	NBR70
11	FF1-CN521H0005644P-11	Fix Seat	PCS	2	ABS756K
10	FF1-CN521H0005644P-10	Body	PCS	1	ABS/MattBlack
9	FF1-CN521H0005644P-9	Connector	PCS	1	Hpb9-1/MattBlack
8	FF1-CN521H0005644P-8	Gradienter for Air-in	PCS	1	POM/M90/本色
7	FF1-CN521H0005644P-7	Washer	PCS	1	N6001
6	FF1-CN521H0005644P-6	O ring	PCS	2	NBR70
5	FF1-CN521G0011899P	Regulator	PCS	1	POM+SUS304
4	FF1-CN521H0005644P-4	Washer	PCS	1	N7001+SUS304
3	FF1-CN521H0005644P-3	Bushing	PCS	1	POM/黑色
2	FF1-CN521H0005644P-2	Screw	PCS	1	SUS304
1	FF1-CN521H0005644P-1	Nut	PCS	1	Hpb9-1/MattBlack

DESIGNED	刘卫群	2022.12.01	TITLE	Head Shower
CHECKED	张光林	2022.12.20	REF	易舒喜挂墙 2寸长方形顶洒_哑光黑
APPROVED	张光林	2022.12.20		
SCALE	MATERIAL	WEIGHT	DWG NO.	FFASS515-000440BF0
1:2	Assembly			

American Standard

REV	DESCRIPTION	DATE	NAME