



Tolerance, Unless Otherwise Stated, Is				
Above	0.5 to and including	6		±0.1
Excess	6 to and including	30		±0.2
Excess	30 to and including	120		±0.3
Excess	120 to and including	315		±0.5
Excess	315 to and including	1000		±0.8
Excess	1000 to and including	2000		±1.2

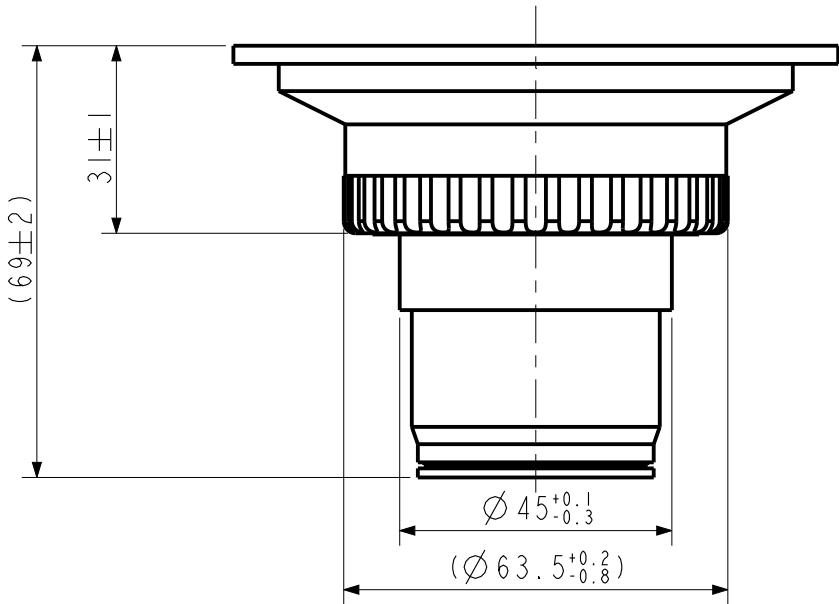


SECTION A-A
SCALE 0.800

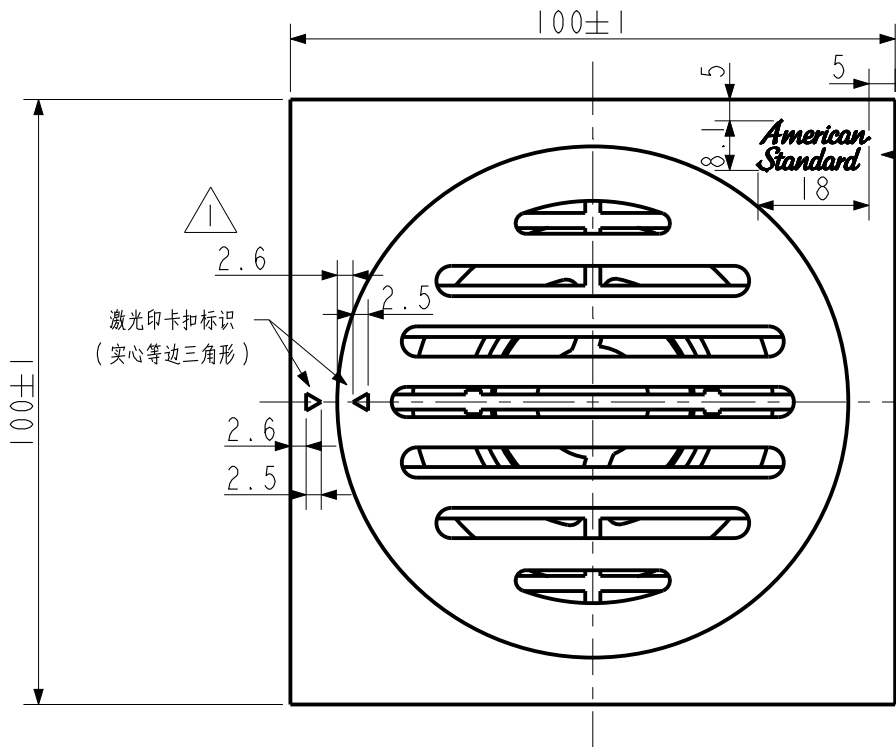


激光印商标

螺纹连接处点胶

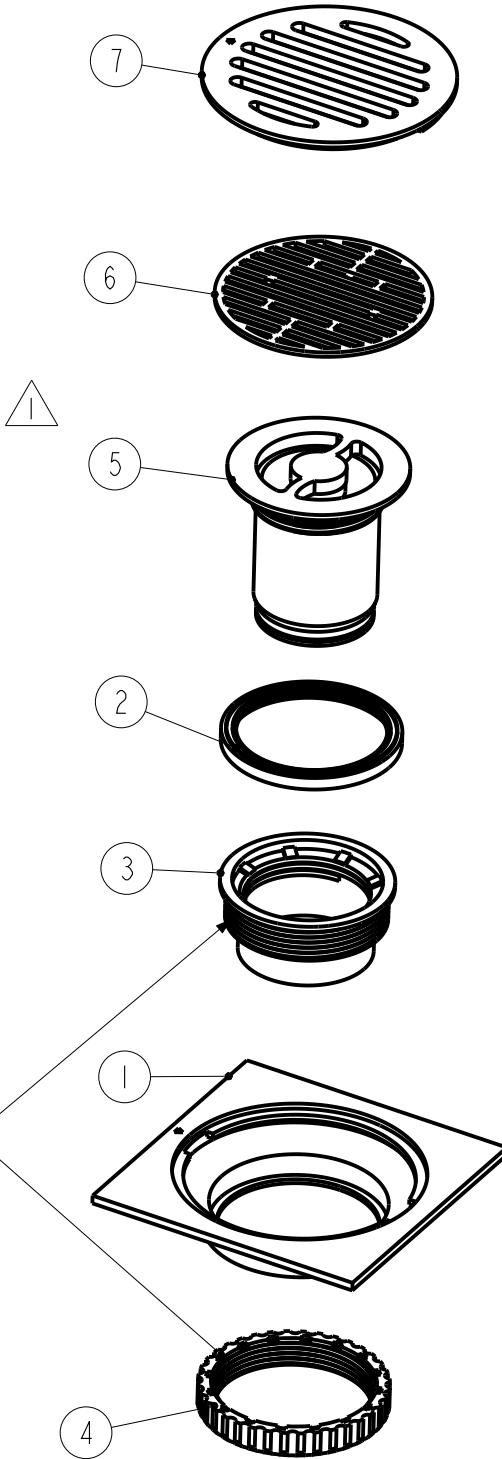

SCALE 0.400

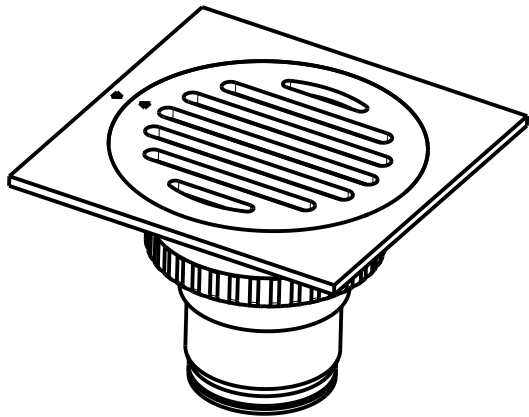


SCALE 0.500


技术要求：

1. 产品无飞边、毛刺；
2. 地漏主体激光印美标商标；
3. 按《W110.0574》地漏进货检验标准进行检验；
4. 包装内盒为黑色彩盒，尺寸为110x135x80；
5. 地漏主体采用PE袋包装，采用白色隔板固定；
6. 内盒放说明书一份，说明书需在指定位置盖印合格印章，内盒外粘贴产品标签一张，位置如下图；
7. 外箱需粘贴两张产品标签。

标签居中粘贴在左侧



7	FF1-CN521Z9Z920201	地漏面板	1	HPb59-1	抛光镀铬
6	FF1-CN521Z9Z920210	过滤网	1	ABS	米色
5	FF1-CN521Z9Z921005	防臭排水芯子	1	ABS+弹簧	米色
4	FF1-CN521Z9Z921004	锁紧螺母	1	ABS	米色
3	FF1-CN521Z9Z921003	下水口转接头	1	ABS	米色
2	FF1-CN521Z9Z921002	密封垫片	1	硅胶	黑色
1	FF1-CN521Z9Z921001	地漏主体	1	HPb59-1	抛光镀铬
序号	物料代码	产品描述	数量	材质	备注

DESIGNED		2021.06.21	TITLE		
CHECKED		2021.6.21	REF		
APPROVED		2021.6.21	CF-9202.001.50\E型方形防臭地漏(镀铬)		
SCALE	MATERIAL	WEIGHT	DWG NO.		
4:5	组件		FFAS9202-001500BC0		

△	1. 更改防臭芯，增加过滤网； 2. 增加激光印卡扣标识。		
REV	DESCRIPTION	DATE	NAME